



Zenty | Professional A/V Solution Provider

User Manual [v1.0]



24 Port PoE Gigabit Ethernet Switch

ZT-120 | ZT-IPSP24

48 Port PoE Gigabit Ethernet Switch

ZT-121 | ZT-IPSP48



ZENTY®

9807 EMILY LANE

STAFFORD, TX 77477

(844) 200-1945

SALES@ZENTY.COM

Table of Contents

1. Introduction.....	6
1.1 Product Introduction	6
1.2 Features	6
1.3 Overview.....	7
1.4 Web Management.....	7
1.5 Web-based User Interface	8
1.6 Main Menu.....	9
2. Network Management	9
2.1 IP Configuration	9
2.2 NTP Configuration	10
2.3 Time Zone	11
2.4 SNMP Configuration.....	12
2.4.1 SNMP System Configuration	13
2.4.2 SNMP Trap Configuration	14
2.4.3 Communities	15
2.4.4 Users.....	15
2.4.5 Views	16
2.4.6 Access.....	17
2.4.7 Groups	18
2.5 System Log Configuration	19
3. Port Configuration	20
3.1 Port Configuration	20
3.2 Link Aggregation.....	21
3.2.1 State Aggregation	21
3.2.2 LACP Aggregation.....	22
3.3 Port Mirroring.....	23
3.4 Thermal Protection Configuration	24
4. PoE Configuration	25
4.1 PoE Setting	26
4.2 PoE Status	27

4.3 PoE Scheduling.....	28
5. Advanced Configuration.....	28
5.1 VLAN.....	28
5.2 Port Isolation.....	32
5.2.1 Port Group	32
5.2.2 Port Isolation	33
5.3 STP	33
5.3.1 STP Bridge Settings	33
5.3.2 MSTI Mapping	35
5.3.3 MSTI Priorities	36
5.3.4 STP Bridge Port	37
5.3.5 MSTI Ports	38
5.4 MAC Address Table	39
5.5 IGMP Snooping.....	40
5.5.1 Basic Configuration.....	40
5.5.2 IGMP Snooping VLAN Configuration	41
5.5.3 Port Filtering Profile	42
5.6 IPMC Profile	43
5.7 IPV6 MLD Snooping.....	44
5.7.1 Basic Configuration	45
5.7.2 VLAN Configuration	46
5.8 ERPS.....	46
5.9 LLDP	49
5.10 Loop Protection	50
6. QoS Configuration.....	51
6.1 QoS Port Classification.....	51
6.2 Port Policing.....	52
6.3 Storm Control Configuration	53
7. Security Configuration	54
7.1 Password.....	54
7.2 802.1X	54
7.3 DHCP Snooping	56

7.3.1 DHCP Overview	56
7.3.2 About DHCP Snooping	56
7.3.3 DHCP Snooping Configuration	57
7.4 IP & MAC Source Guard	58
7.4.1 Port Configuration	58
7.4.2 Static Table	59
7.5 ARP Inspection	60
7.5.1 Port Configuration	60
7.5.2 VLAN Configuration	61
7.5.3 Static Table	62
7.6 ACL	63
7.6.1 ACL Ports Configuration	63
7.6.2 Rate Limiter Configuration	64
7.6.3 Access Control List Configuration	65
8. Diagnostics	66
8.1 Ping Test	66
8.2 Cable Diagnostics	67
8.3 CPU Load	67
9. System Defaults	68
9.1 Restart Device	68
9.2 Factory Default	68
9.3 Firmware Upgrade	69
9.4 Firmware Select	69
9.4.1 Download Configuration File	70
9.4.2 Upload Configuration File	71
9.4.3 Activate Configuration	72
9.4.4 Delete Configuration File	72
10. Appendix 1 Term List	73
11. Appendix 2 FAQ	74
12. Maintenance	75
13. Warranty	75
14. Mail-in Service	75

15. Limited Warranty Limits and Exclusions	75
--	----

1. Introduction

1.1 Product Introduction

This series supports IPv4 / IPv6 double stack platform, and supports a variety of senior management functions, including POE management, MAC Table, VLANs, Port Isolation, Loop Protection, IGMP Snooping, MLD Snooping, ERPS, DHCP client, DHCP Snooping, STP/RSTP/MSTP, 802.1x, QoS, port mirror, LLDP, static routing and NTP etc., 128 static routing and basic QinQ, to provide users with the perfect solution; At the same time the whole series supports SNMP v1 / v2, v3 (Simple Network Management Protocol), CLI command line, Web net tube, TELNET mode of Management, make equipment management more convenient, at the same time, with the ACL control function, attack prevention function, ensuring secure management.

The series complies with FCC and CE standards, and support 1 channel ac power input. Using the mute fan, can adapt to work environment temperature range of - 40 °C to 75 °C, also, it can satisfy the requirements of the various site and provide reliable, economical solution.

1.2 Features

- IEEE802.3, IEEE802.3u, IEEE802.3ab, IEEE802.3z, IEEE802.3ae
- V-Ring looped redundancy technology. Self-healing time for looped network is less than 20ms.
- PoE management, POE load timing restart and on-off.
- IGMP Snooping, Static multicast filtering, MLD Snooping filtering
- DHCP Snooping, protect from ARP attack, attack of illegal DHCP server access
- NTP, easy for real-time synchronization of network time
- Supports SNMP v1/v2/v3
- Supports LLDP
- ACL, enhance the flexibility and safety of network management
- QoS, enhance the stability of network
- Port mirror, convenient for online debug
- Cable testing, convenient for the examining cable length in a project
- STP/RSTP/MSTP, enhance the stability of network
- IEEE802.1Q VLAN, IEEE802.1ad QinQ
- 802.1x authentication to port and MAC
- Static routing L3 switching technology
- Operation temperature range: -40°C~75°C

- Storage temperature range: -40°C~85°C

1.3 Overview

Thank you for purchasing our managed switch series, whose software function can be managed, configured and monitored via embedded Web-based (HTML) interface. By a standard browser, you can manage switch at any remote site in the network. The browser, as a universal access tool, uses the HTTP protocol to communicate with switch directly.

1.4 Web Management

Open installed web browser on your PC, input the switch's IP address like `http://xxx.xxx.xxx.xxx`, then open that URL to login web management.

Note: IP address of switch is **192.168.2.1** by default. So please input **http://192.168.2.1** in browser.

When the login window appears, please enter the default username "**admin**" with password "**system**". Then click OK to login.



Figure 1-1 Login Window

Default User Name: **admin**

Default Password: **system**

1.5 Web-based User Interface

After entering the username and password, the main screen appears as shown in Figure 1-2.

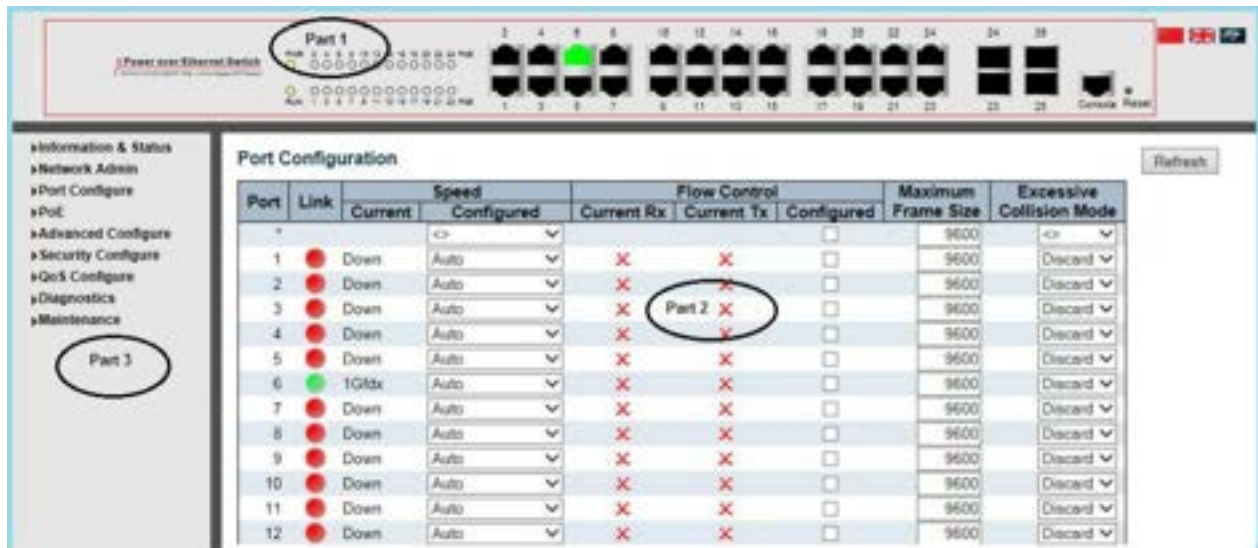


Figure1-2 Web management Main Page interface

This Main Page interface includes mainly 3 parts. Here is the description:

Part	Description
Part 1	Company LOGO; Panel display; Port indicators, including PoE and Link working status; Language selection button; Help document
Part 2	The Main Menu, lets you access all the commands and statistics
Part 3	Main Screen, showing configuration details

The Web agent displays an image of the Managed Switch's ports. Different colors mean different states, they are illustrated as follows:

: 100Mbps linked ; : 1000Mbps linked ; : No link

1.6 Main Menu

Using the onboard Web agent, you can define system parameters, manage and control the Managed Switch, and all its ports, or monitor network conditions. Via the Web-Management, the administrator can set up the Managed Switch by selecting the functions those listed in the Main Menu. Following is short description:

Information & Status - Users can check switch information and working status under this menu.

Network Admin - Users can check and configure related features of network under this menu.

Port Configure - Users can check and configure specification of ports under this menu.

PoE - Users can check and configure related features of Power-over-Ethernet (PoE) under this menu.

Advanced Configure - Users can check and configure L2 advanced features under this menu.

Security Configure - Users can check and configure security features of the switch under this menu.

QoS Configure - Users can check and configure QoS features of the switch under this menu.

2. Network Management

2.1 IP Configuration

Note: IP address of switch is **192.168.2.1** by default, and the default subnet mask is **255.255.255.0** (24).

Click "Network Admin" > "IP", and the screen will show as:

IP Configuration

Mode: Host
DNS Server: Host
DNS Proxy: Router

IP Interfaces

Delete	VLAN	IPv4 DHCP	IPv4	IPv6				
		Enable	Fullmask	Current Lease	Address	Mask Length	Address	Mask Length
☐	1	☐	0		192.168.2.2	24	2001::1	64

Add Interface

IP Routes

Delete	Network	Mask Length	Gateway	Next Hop VLAN
Delete	0.0.0.0	0	192.168.2.3	0

Add Route

Save Reset

Figure 2-1 IP Configuration Screen

Following is description detail about IP configuration:

Name	Description
Port Name	Display system's port name
VLAN	VLAN for for access and management of switch
IPv4 DHCP	- If enable, it means that VLAN port start IPv4 DHCP client, to dynamically get IPv4 addresses of the switch. Otherwise, it will use switch's static IP configuration. - Fallback(Seconds), means the waiting time for switch to get dynamic IP address via DHCP. The value of "0" here means never over the time. - Current Lease, means the IP address get from DHCP
IPv4	- Address: static IPv4 address entered by user. - Mask Length: static IPv4subnetmask entered by user.
IPv6	- IP Address, Users can input the static IPv6 address - IP Mask, Users can input the static IPv6 subnet mask
IP Routes	- Destination, Users can input the IPv4 address of destination - IP Mask, Users can static IPv4 subnet mask - Next address, Users can input next IPv4 address

Click **"Add Interface"** to create a new management for VLAN and IP address. Click **"Save"** to save settings.

Note: The switch only created VLAN1 by default. If user needs to use other VLAN for switch management, please first add VLAN in the VLAN module, and add the relevant port to the VLAN.

2.2 NTP Configuration

NTP is an acronym for Simple Network Time Protocol, a network protocol for synchronizing the clocks of computer systems. You can specify NTP Servers and set GMT Time zone. The NTP Configuration screens will appear after you click **"Network Admin"** > **"NTP"**.

The screenshot shows the NTP Configuration interface. On the left, a navigation menu lists 'Information & Status', 'Network Admin' (expanded), and other settings. Under 'Network Admin', 'NTP' is selected and highlighted with an orange box. The main configuration area has a title 'NTP Configuration' and a table with the following structure:

Mode	Enabled ▼
Server 1	
Server 2	
Server 3	
Server 4	
Server 5	

Below the table are two buttons: 'Save' and 'Reset'.

Figure 2-2 NTP Setting Screen

Configuration object and description is:

Object	Description
Mode	Click drop-down menu to select "Enabled" or "Disabled"NTP. Enabled: Enable NTP mode operation. When enabling NTP mode operation, the agent forwards and transfers NTP messages between the clients and the server when they are not on the same subnet domain. Disabled: Disable NTP mode operation.
NTP Sever	After input NTP server IP address, NTP information will be get from that server.

After configuration was set, please click "**Save**" to save the setting.

2.3 Time zone

Time zone is to set the time of the switch, users can set the time according to their locations. You can get into the time zone through "Network admin" > "Time zone", as below figure 2-3.

Configuration instructions

Item	Instruction
Time zone setting	Input the time

Click "save" to enable your settings.

2.4 SNMP Configuration

Simple Network Management Protocol (SNMP) is an application layer protocol that facilitates the exchange of management information between network devices. It is part of the Transmission Control Protocol/Internet Protocol (TCP/IP) protocol suite. SNMP enables network administrators to manage network performance, find and solve network problems, and plan for network growth.

This switch support SNMPv1, v2c, v3. Different versions of SNMP provide different security level for management stations and network devices.

In SNMP's v1 and v2c, it uses the "Community String" for user authentication. That string is similar to password function. SNMP application of remote user and SNMP of the Switch must use the same community string. SNMP packets of any unauthorized sites will be ignored (discarded).

"Community String" by default for switch's SNMPv1 and v2c access management is:

1. **public** – allow authentication management station to read MIB objects.
2. **private** – allow authentication management station to read, write and edit MIB objects.

Trap

Used by the agent to asynchronously inform the NMS of some event. These events may be very serious, such as reboot (someone accidentally turned off switch), or just general information, such as port status change. In these cases, switch create trap information and send then to receiver or network admin. Typical trap includes authentication failure, networking changes and cold/hot start trap.

MIB

MIB is a collection of managed objects residing in a virtual information store. Collections of related managed objects are defined in specific MIB modules. Switch uses standard MIB-II information management module. So, MIB object value can be read by any SNMP web-managed software.

2.4.1 SNMP System Configuration

You can enable or disable the SNMP System Configuration. Its screen will appear after you click "Network Admin" > "SNMP" > "System".

SNMP System Configuration	
Mode	Enabled
Version	SNMP v2c
Read Community	public
Write Community	private
Engine ID	800007e5017f000001

Save Reset


Figure 2-3-1 SNMP System Setting Screen

Configuration object and description is:

Object	Description
Mode	Enabled or DisableSNMP function
Version	Click drop-down menu to select SNMP v2c or SNMP v1 version
Read Community	Public: allow authentication management station to read MIB objects
Write Community	Private: allow authentication management station to read and write MIB objects.

2.4.2 SNMP Trap Configuration

User can enable or disable SNMP Trap function and set configuration. Click "Network Admin" > "SNMP" > "Trap", then this screen will show as:

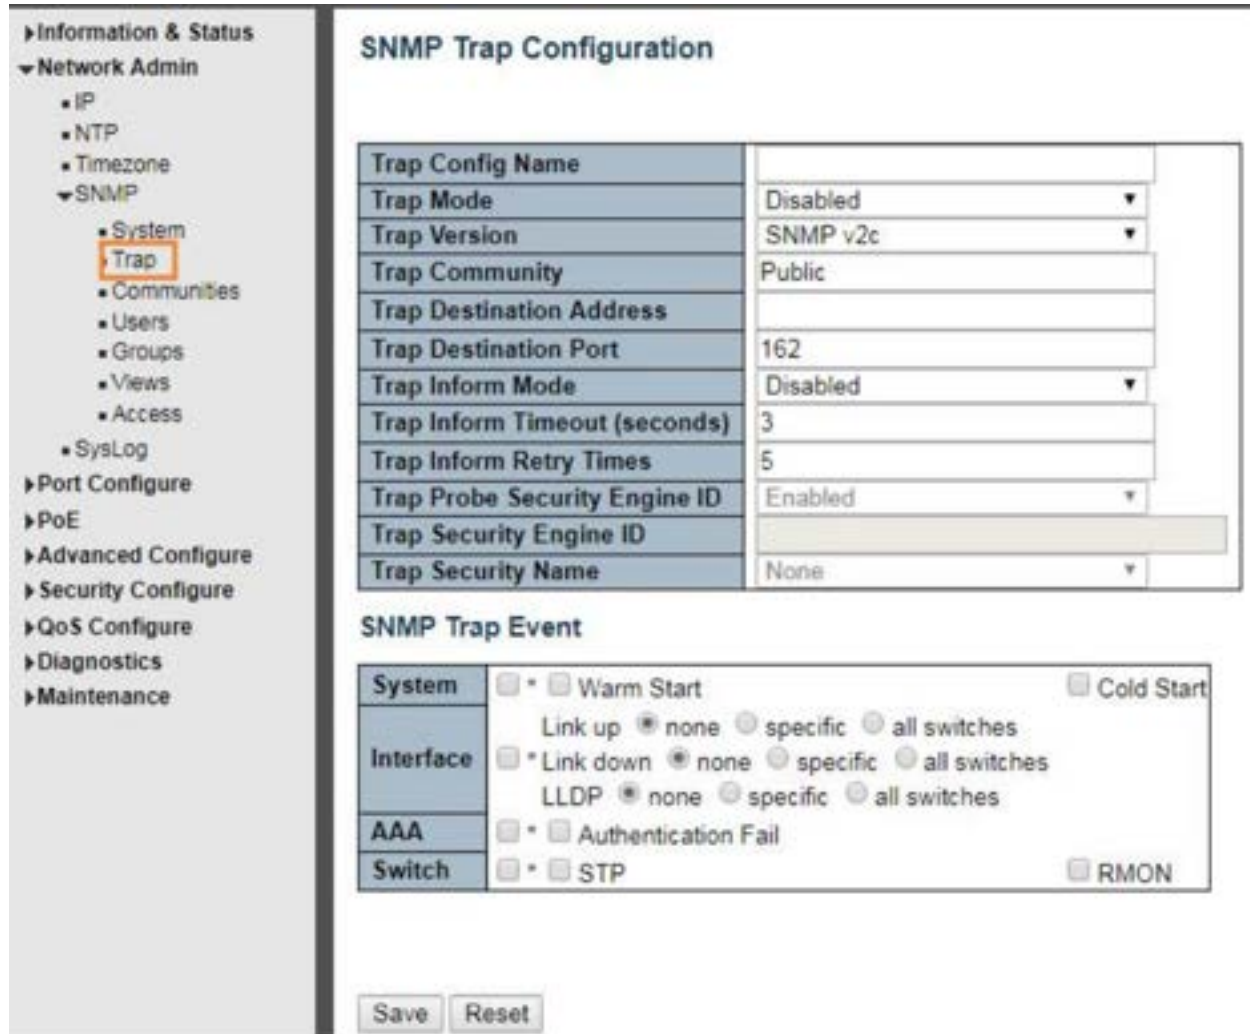

The screenshot displays the 'SNMP Trap Configuration' web interface. On the left is a navigation menu with categories like 'Information & Status', 'Network Admin', 'Port Configure', 'PoE', 'Advanced Configure', 'Security Configure', 'QoS Configure', 'Diagnostics', and 'Maintenance'. Under 'Network Admin', the 'SNMP' sub-menu is expanded, and the 'Trap' option is highlighted with an orange box. The main content area is titled 'SNMP Trap Configuration' and contains two sections: 'Trap Config' and 'SNMP Trap Event'.

Trap Config Name	
Trap Mode	Disabled ▼
Trap Version	SNMP v2c ▼
Trap Community	Public
Trap Destination Address	
Trap Destination Port	162
Trap Inform Mode	Disabled ▼
Trap Inform Timeout (seconds)	3
Trap Inform Retry Times	5
Trap Probe Security Engine ID	Enabled ▼
Trap Security Engine ID	
Trap Security Name	None ▼

SNMP Trap Event

System	☐ * ☐ Warm Start ☐ Cold Start
Interface	Link up ☒ none ☐ specific ☐ all switches
	* Link down ☒ none ☐ specific ☐ all switches
	LLDP ☒ none ☐ specific ☐ all switches
AAA	☐ * ☐ Authentication Fail
Switch	☐ * ☐ STP ☐ RMON

At the bottom of the configuration area are 'Save' and 'Reset' buttons.

Figure 2-3-2

2.4.3 Communities

Users can set the new community's name through "Network admin" > "SNMP" > "Communities", as below figure 2-4-3.

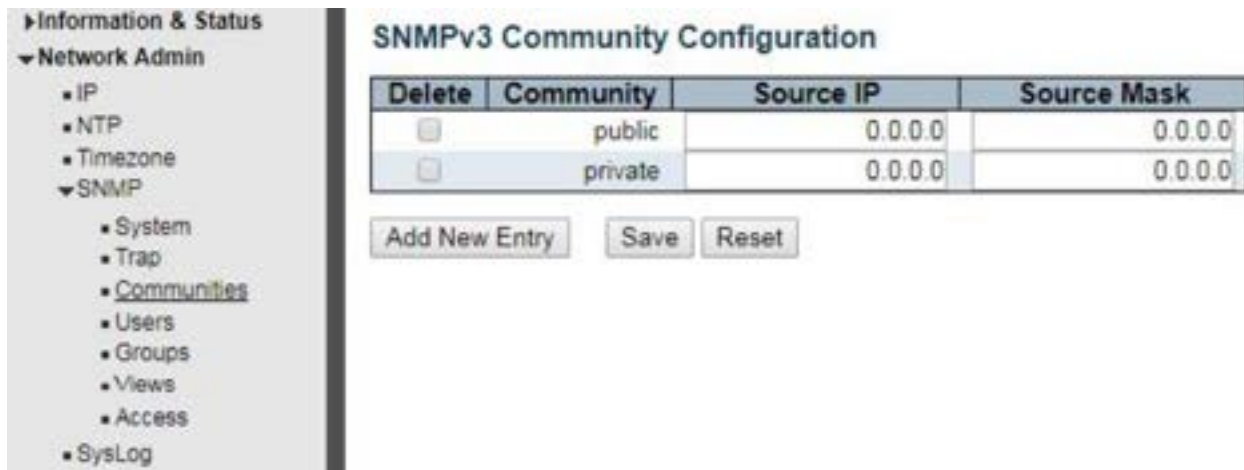


Figure 2-4-3 Adding Community

Configuration Instruction:

Item	Instruction
Community	Input the name of the new community
Source IP	Input IPv4 source address
Source Mask	Input IPv4 subnet mask

Click "Save" to enable your settings.

2.4.4 Users

SNMP v3 is using USM (User-Based Security Model) authentication mechanism. The administrator can set authentication and Encryption function. The authentication is to verify the validity of a message sender and to avoid illegal user access. Encryption is for encrypting the communication between NMS and Agents to be bugged. Adopting above two functions, it provides greater security for communication between NMS and Agent.

Users can set a SNMP v3 account and EncryMode. Click "Network Admin" > "SNMP" > "Users", as below:

SNMPv3 User Configuration

Delete	Engine ID	User Name	Security Level	Authentication Protocol	Authentication Password	Privacy Protocol	Privacy Password
☐	800007e5017f000001	default_user	NoAuth, NoPriv	None	None	None	None

Figure 2-4-4 Adding Users

Object	Instruction
Engine ID	Default Value 800007e5017f000001. The switch default value is recommended
User Name	Input the new account name of SNMPv3
Security Level	Three EncryModes, NoAuth, NoPriv , Auth, NoPriv , Auth,Priv, choosing by dropping down the menu
Authentication Protocol	Choose for MD5 and SHA
Authentication Password	Input the encrypted password
Privacy Protocol	Choose for DES and AES
Privacy Password	Input the encrypted password

Click "Save" to enable your settings.

2.4.5 Views

Users can set the visit view of SNMPv3. Click "**Network Admin**" > "**SNMP**" > "**View**". As below:

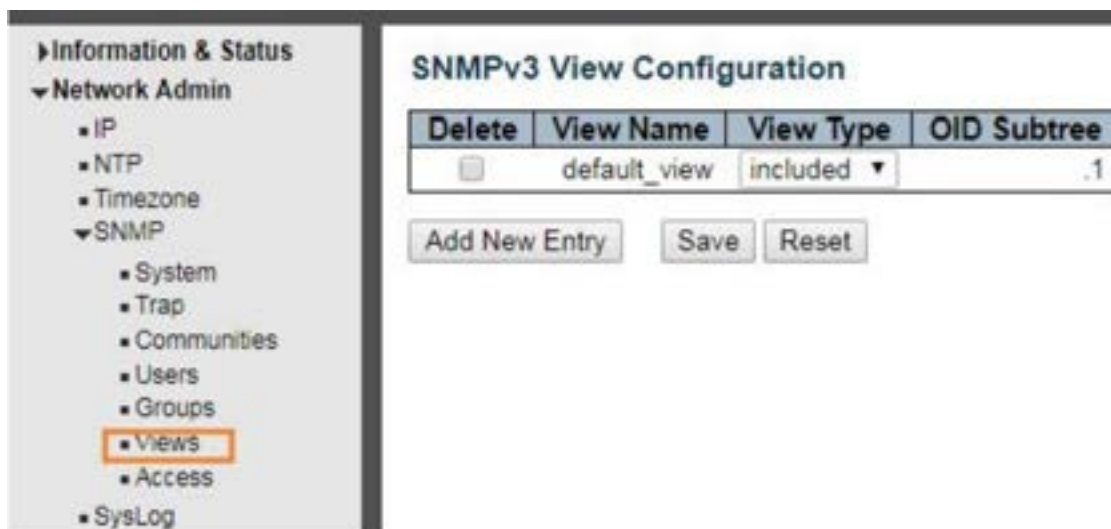


Figure 2-4-5 SNMPV3 Adding Views


Configuration Instruction

Object	Instruction
Views Name	Input the name of Views
Views Type	Choose for included and excluded
OID Subtree	Input OID subtree, such as 1.2

Click "Saving" to enable your settings.

2.4.6 Access

Users can set an Access to load a built Views. Click "Network Admin" > "SNMP" > "Access", as below:

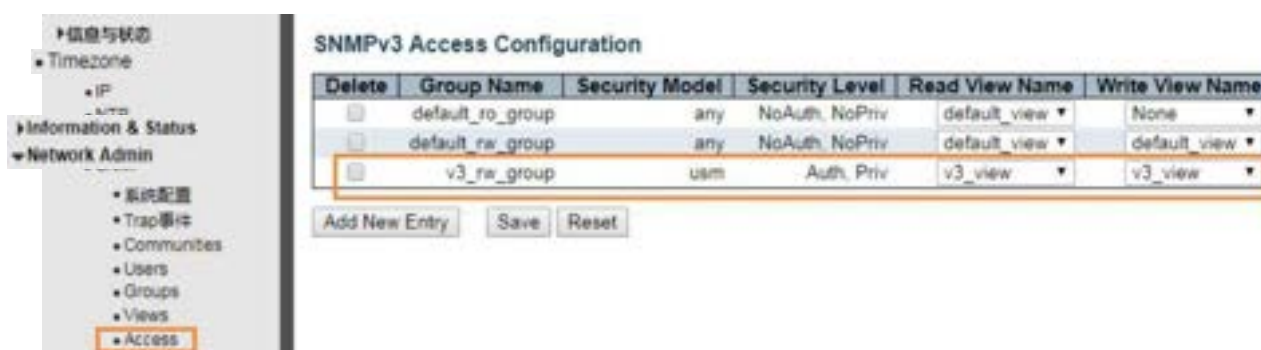

Configuration Instruction

Object	Instruction
Group Name	Input the name of group
Security Model	Choose for any v1 v2c usm
Security Level	Three EncryModes, NoAuth, NoPriv, Auth, NoPriv, Auth,Priv, choosing by dropping down the menu
Read View Name	Chose the built views
Write View Name	Chose the built views

Click "Save" to enable your settings.

2.4.7 Groups

Users can set Groups to load built Users and Access. Click "Network Admin" > "SNMP" > "Groups", as below:

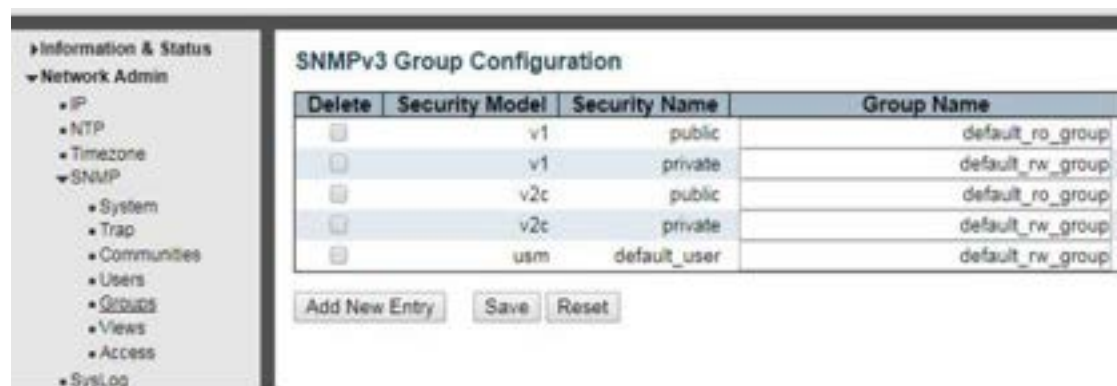


Figure 2-4-7 SNMPV3 Groups Load Setting

Configuration Instruction:

Object	Instruction
Security Model	Choose for v1 v2c usm
Security Name	Choose the built account name. For built team name under v1 v2c, built account name under usm
Group Name	Input built group name

Click "Save" to enable settings.

2.5 System Log Configuration

Users can configure switch's system log, via following screen after clicking "**Network Admin**" > "**Syslog**".

Figure2-4System Log Configuration Screen


Configuration object and description is:

Object	Description
Server Mode	Enabled or Disable SNMP System Log function. If "Enable" 'is selected, switch will send System Log to defined server.
Server Address	Defined server IP address
Syslog Level	To define level of System Log, including: Info: Information, warnings and errors. Warning: warnings and errors. Error: errors.

3. Port Configuration

3.1 Port Configuration

This page is for configuring port specifications of switch. After clicking "Port Configure" > "Ports", this screen will appear as:

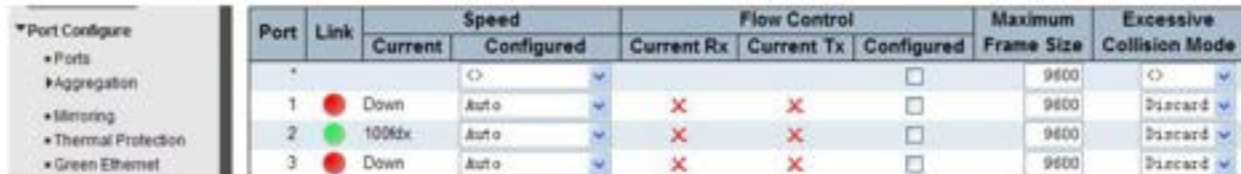

The screenshot shows the 'Port Configure' screen with a sidebar on the left containing links: Ports, Aggregation, Mirroring, Thermal Protection, and Green Ethernet. The main area displays a table with columns: Port, Link, Speed (Current, Configured), Flow Control (Current Rx, Current Tx, Configured), Maximum Frame Size, and Excessive Collision Mode. The table has three rows for ports 1, 2, and 3. Port 1 is 'Down' (red dot), Port 2 is '1000dx' (green dot), and Port 3 is 'Down' (red dot). All 'Configured' speed and flow control settings are set to 'Auto' or 'Disabled' (checkboxes), and the 'Maximum Frame Size' is 9600 and 'Excessive Collision Mode' is 'Discard'.

Port	Link	Speed		Flow Control			Maximum Frame Size	Excessive Collision Mode
		Current	Configured	Current Rx	Current Tx	Configured		
1	Down		Auto	X	X		9600	Discard
2	1000dx		Auto	X	X		9600	Discard
3	Down		Auto	X	X		9600	Discard

Figure 3-1 Port Configure Screen

Configuration object and description is:

Object	Description
Link	Red color means Link Down, green color means Link Up
Speed	Select the port speed and full / half duplex mode. "Disabled" means that port is disabled. "Auto" meaning in full-duplex (FDX) or half-duplex mode (HDX) (1000mbps always in full-duplex mode) auto negotiate among 10,100,1000Mbps devices. "Auto" setting allows the port to automatically determine the fastest settings for the device connected, and to apply these settings. "1000-X_AMS" means that port is Ethernet/Optical combo port, and optical port is prioritized. Other options are 10M HDX, 10M FDX, 100M HDX, 100M FDX, 1000M FDX, 1000-X.
Flow Control	It is a flow control mechanism for a variety of port configurations. Full-duplex ports use 802.3x flow control, half-duplex ports use backpressure flow control. It is disabled by default. Check to enable flow control.
Maximum Frame Size	It is used to set the maximum frame size for Ethernet. The default setting is 9600, which is to support Jumbo frames.

Click "Save" to store and active settings.

3.2 Link Aggregation

Users can set up multiple links among multiple switches. Link Aggregation, is a method that tie some physical ports together as one logic port, to enlarge bandwidth. This switch supports up to 13 groups Link Aggregation, 2 to 8 ports as one group.

Note: If any port in the link aggregation group is disconnected, data packet that sent to disconnected port will share load with other connected port in this aggregation group.

3.2.1 Static Aggregation

In this page, user can configure static aggregation of switch's ports. After clicking the menu "Port Configure" > "Aggregation" > "Static", followed window will appear for making static aggregation settings.

Aggregation Mode Configuration

Hash Code Contributors	
Source MAC Address	☒
Destination MAC Address	☒
IP Address	☒
TCP/UDP Port Number	☒

Aggregation Group Configuration

Group ID	Port Members																									
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26
Normal	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒
1	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
2	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
3	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
4	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
5	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
6	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
7	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
8	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
9	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
10	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
11	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
12	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
13	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐

Save Reset

Figure 3-2Port Static Aggregation Configuration Screen

Configuration object and description is:

Object	Description
Aggregation Mode Configuration	This parameter is flow hash algorithm among LAG(Link Aggregated Group) ports.
Group ID	Static aggregation group ID
Port Members	This switch supports up to 13 groups Link Aggregation, 2 to 8 port as one group.

Click **"Save"** to store and active settings.

Note: It allows a maximum of 8 ports to be aggregated as 1 static trunk group at the same time.

3.2.2 LACP Aggregation

Link Aggregation Control Protocol (LACP) provides a standardized means for exchanging information between Partner Systems that require high-speed redundant links. Link aggregation lets you group up to eight consecutive ports into a single dedicated connection. This feature can expand bandwidth to a device on the network. LACP operation requires full-duplex mode. For more detailed information, refer to the IEEE 802.3ad standard.

Users can create dynamic aggregation group for switches. After clicking **"Port Configure"** > **"Aggregation"** > **"LACP"**, users can set LACP configuration in following screen:

Port	LACP Enabled	Key	Role	Timeout	Prio
*	☐	<>	<>	<>	32768
1	☐	Auto	Active	Fast	32768
2	☐	Auto	Active	Fast	32768
3	☐	Auto	Active	Fast	32768
4	☐	Auto	Active	Fast	32768
5	☐	Auto	Active	Fast	32768

Figure 3-3 LACP Configuration Screen

Configuration object and description is:

Object	Description
LACP	Enable or disable LACP function of that port.
Key	The Key value incurred by the port, range 1-65535 . The Auto setting will set the key as appropriate by the physical link speed, 10Mb = 1, 100Mb = 2, 1Gb = 3. Using the Specific setting, a user-defined value can be entered. Ports with the same Key value can participate in the same aggregation group, while ports with different keys cannot.
Role	The Role shows the LACP activity status. The Active will transmit LACP packets each second, while Passive will wait for a LACP packet from a partner (speak if spoken to).
Timeout	The Timeout controls the period between BPDU transmissions. Fast will transmit LACP packets each second, while Slow will wait for 30 seconds before sending a LACP packet.
Prio	The Prio controls the priority of the port. If the LACP partner wants to form a larger group
	than is supported by this device then this parameter will control which ports will be active and which ports will be in a backup role. Lower number means greater priority.

Click "**Save**" to store and active settings.

3.3 Port Mirroring

Configure port Mirroring on this page. This function provides monitoring of network traffic that forwards a copy of each incoming or outgoing packet from one port of a network switch to another port where the packet can be studied. It enables the manager to keep close track of switch performance and alter it if necessary.

To configure Mirror settings, please click "**Port Configure**" > "**Mirroring**". Then following screen will appear as:

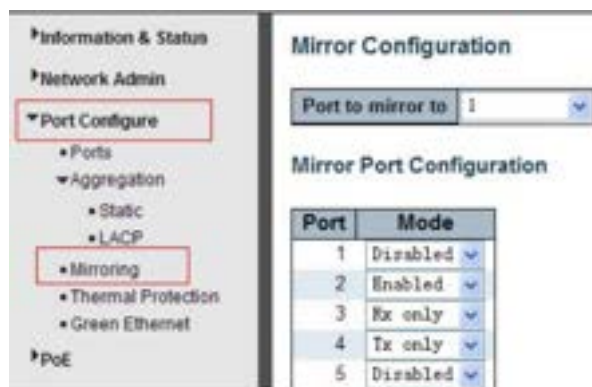


Figure 3-4 Mirror Configuration Screen

Configuration object and description is:

Object	Description
Port mirror to	Frames from ports that have either source (rx) or destination (tx) mirroring enabled are mirrored on this port. Disabled disables mirroring.
Mode	Select source port mirror mode. Rx only Frames received on this port are mirrored on the mirror port. Frames transmitted are not mirrored. Tx only Frames transmitted on this port are mirrored on the mirror port. Frames received
	are not mirrored. Disabled Neither frames transmitted nor frames received are mirrored. Enabled Frames received and frames transmitted are mirrored on the mirror port. Note: For a given port, a frame is only transmitted once. It is therefore not possible to mirror mirror port Tx frames. Because of this, mode for the selected mirror port is limited to Disabled or Rx only .

Click "Save" to store and active settings.

Note: You cannot set fast speed port(s) mirror to a low-speed port. For example, there is problem if you try to mirror 100Mbps port(s) to a 10 Mbps port. So, destination port should have equal or higher speed comparing to source port. Besides, source port and destination port should not be same one.

3.4 Thermal Protection Configuration

Thermal protection is for detecting and protecting working switch. When switch detected port temperature is higher that defined temperature, system will disable the port, to protect switch itself.

After clicking "**Port Configure**" > "**Thermal Protection**", following screen will appear as:

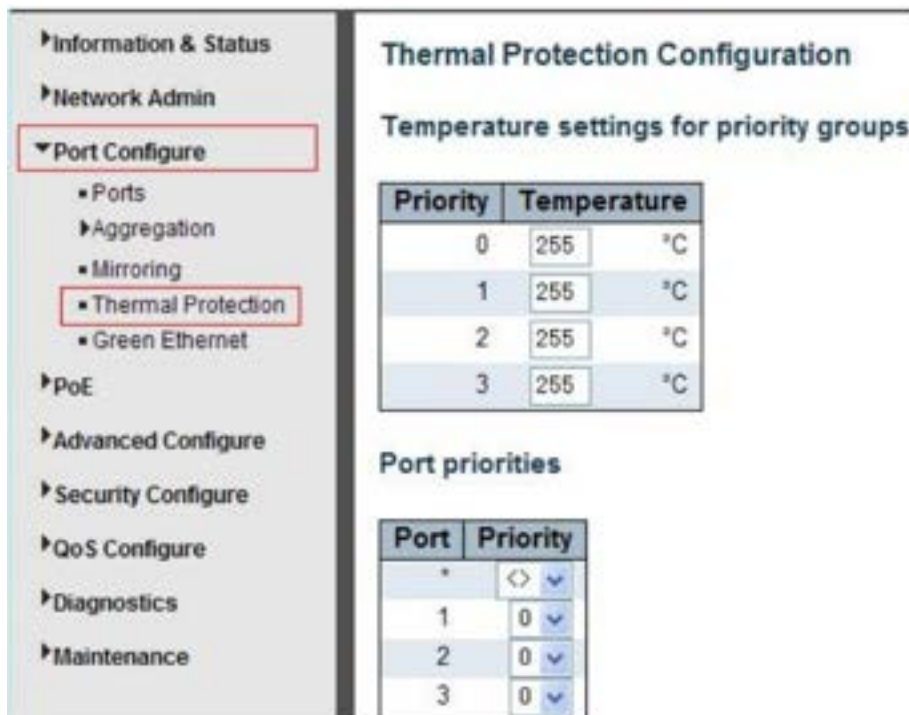


Figure 3-5 Thermal Protection Configuration Screen

Configuration object and description is:

Object	Description
Temperature settings for priority groups	This switch support 4 Thermal Protection priority groups, and each of them can have a defined temperature for protection.
Port priorities	Define which priority group that port belong to.

Click "Save" to store and active settings.

Note: By default, all ports of switch belong to Priority Group 0, with protected temperature 225-degree C.

4. PoE Configuration

Power-over-Ethernet (PoE), means Ethernet network power supply via 100BASE-TX, 1000BASE-T. Its maximum power distance is 100 meters. By PoE power system, based on Ethernet wiring network of UTP Cat5 or higher Cable, it can give power to IP camera, VoIP phone, wireless AP, as well as transmit data. So, there is no need to concern about the power wire building, reducing the cost of

networking building.

PoE power supply system has unified standard, IEEE 802.3af and 802.3at. So, devices from different manufacturers have no problem in general usage, as long as they are complied with these standards.

PD, it is defined as powered device in the PoE Power Supply System, primarily including IP camera, wireless AP, network VoIP phone, and other IP-based terminal equipment.

The whole process of PoE:

1. Detection: At beginning, PSE device output a very small voltage, to detect and judge if its linked PD is IEEE802.3af / IEEE802.3at compliant device. Only if detected that PD is a standard compliant device, then it will go to next step.

2. PD Classification: After detecting PDs, PSE will classify them and recognize what is the power that PD required.

3. Power up: When above 2 steps finished, PSE start feeding required power for PD, with 44~57VDC output voltage.

4. Power supply: PSE provides stable 44~57V DC to PDs, and auto feeding power as requirement of PDs. Maximum power of single PoE port for IEEE 802.3af devices: 15.4W; Maximum power of single PoE port for IEEE 802.3at devices: 25.5W.

5. Disconnection: If PD is disconnected or user disable PoE from management software, PSE will quickly(300-400ms) stop powering PD.

In any moment of PSE powering PD process, PSE will stop working and then restart from step1 if abnormal situation happens, such as PD Short circuit, power consumption is higher than feeding power, and so on.

4.1 PoE Setting

After clicking "PoE" > "PoE Setting", user can make PoE settings in following screen:

Port	PoE Mode	Priority	Maximum Power [W]	Description
*	<>	<>	15.4	
1	PoE	Low	15.4	
2	PoE	Low	15.4	
3	PoE	Low	15.4	
4	PoE	Low	15.4	
5	PoE	Low	15.4	
6	PoE	Low	15.4	
7	PnF	Low	15.4	

Figure 4-1 PoE Setting Screen

Configuration object and description is:

Object	Description
Reserved Power determined by	This switch supports 2 modes for reserved power determination. Auto : Switch automatically assigned maximum power of switch port according to detected PD class. About PD Class, please refer to the 802.3af / 802.3at definition. Manual : Maximum reserved power of the port is customize by the user.
Power Management Mode	This switch supports 2 modes for Power Management. 1. Actual Consumption : In this mode, when the actual power consumption of all the ports exceeds the switch's power budget, the lowest priority port will be shut down. If all ports have the same priority, then the maximum port number would be shut down. 2. Reserved Power : In this mode, when the reserved power consumption of all the ports exceeds the switch's power budget, the port that connect to new PD will not be enabled.
Primary Power Supply [W]	Users can set the maximum primary power of the whole switch. Default setting is 370W.
PoE Mode	This switch support 802.3af(PoE) and 802.3at(PoE+) mode. Default setting is 802.3at.
Priority	Define the priority of the PoE port. Priority from low to high is Low, High, Critical.
Maximum Power(W)	It is for define port's maximum Power when user set Manual as reserved power determination mode.

Click "Save" to store and active settings.

4.2 PoE Status

In this page, user can check and look PoE status of all ports, after clicking "PoE" > "PoE Status".

- Information & Status
- Network Admin
- Port Configure
- PoE
 - PoE Setting
 - PoE Scheduling
 - PoE Status
- Advanced Configure
- Security Configure
- QoS Configure
- Diagnostics
- Maintenance

Power Over Ethernet Configuration

Reserved Power determined by
☒ Auto
☐ Manual

Power Management Mode
☒ Actual Consumption
☐ Reserved Power

PoE Power Supply Configuration

Primary Power Supply [W]

PoE Port Configuration

Port	PoE Mode	Priority	Maximum Power [W]	Description
* <>	<>	<>	15.4	
1	PoE	Low	15.4	
2	PoE	Low	15.4	
3	PoE	Low	15.4	
4	PoE	Low	15.4	
5	PoE	Low	15.4	
6	PoE	Low	15.4	
7	PoE	Low	15.4	

Figure 4-2 PoE Status Screen

4.3 PoE Scheduling

This series supports PoE scheduling, users can set timing PoE reboot and enable/disable PoE on time schedule.

Click “PoE” > “PoE Scheduling”, as below:

PoE Scheduling Configuration

Tip: You will need get the day of time updated(by NTP) before PoE scheduling work as expectation

Port	Monday		Tuesday		Wednesday		Thursday		Friday		Saturday		Sunday	
	Start	End	Start	End	Start	End	Start	End	Start	End	Start	End	Start	End
1	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled
2	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled
3	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled
4	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled
5	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled
6	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled
7	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled
8	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled

Save Reset

Figure 4.3PoE Scheduling

Object	Instruction
Cycle	Selection range: Monday to Sunday.
Start	Restoration for PoE, Time range: 00:00-24:00
End	Time range: 00:00-24:00

5. Advanced Configuration

5.1 VLAN

VLAN (Virtual Local Area Network) logically divide one LAN (Local Area Network) into a plurality of subsets, and each subset will form their own broadcast area network. In short, VLAN is a communication technology that logically divide one physical LAN into multiple broadcast area network (multiple VLAN). Hosts within a VLAN can communicate directly. But VLAN groups can not directly communicate with each other. So, it will limit the broadcast packets within a VLAN. Since it cannot directly access between VLAN groups, thus it improves network security.

Click "Advanced Configure" > "VLANs" to see 802.1Q VLAN configuration screen as following:

Information & Status

Network Admin

Port Configure

Port

Advanced Configure

MAC Table

VLANs

Port Isolation

Loop Protection

Spanning Tree

MEP

ERPS

IGMP Snooping

LLDP

Global VLAN Configuration

Allowed Access VLANs

1

Ethertype for Custom S-ports

802.1Q

Port VLAN Configuration

Port	Mode	Port VLAN	Port Type	Ingress Filtering	Ingress Acceptance	Egress Tagging	Allowed VLANs	Forbidden VLANs
1	Access	1	C-Port	☒	Tagged and Untagged	Untag Port VLAN	1	
2	Access	1	C-Port	☒	Tagged and Untagged	Untag Port VLAN	1	
3	Access	1	C-Port	☒	Tagged and Untagged	Untag Port VLAN	1	
4	Access	1	C-Port	☒	Tagged and Untagged	Untag Port VLAN	1	
5	Access	1	C-Port	☒	Tagged and Untagged	Untag Port VLAN	1	

Figure 5-1802.1Q VLAN Configuration Screen

Configuration object and description is:

Object	Description
Allowed VLANs	Here displays created VLAN ID. It is 1 by default. If you want to create new VLAN, just need to add VLAN ID here.
Ethertype for Custom S-ports	This field specifies the ethertype/TPID (specified in hexadecimal) used for Custom S-ports. The setting is in force for all ports whose Port Type is set to S-Custom-Port.
Mode	The port mode (default is Access) determines the fundamental behavior of the port in question. A port can be in one of three modes as described below. Whenever a particular mode is selected, the remaining fields in that row will be either grayed out or made changeable depending on the mode in question. Grayed out fields show the value that the port will get when the mode is applied. Access: Access ports are normally used to connect to end stations. Access ports have the following characteristics: - Member of exactly one VLAN, the Port VLAN (a.k.a. Access VLAN), which by default is 1 - Accepts untagged and C-tagged frames - Discards all frames that are not classified to the Access VLAN - On egress all frames classified to the Access VLAN are transmitted untagged. Other (dynamically added VLANs) are transmitted tagged

	<u>Trunk:</u> Trunk ports can carry traffic on multiple VLANs simultaneously, and are normally used to connect to other switches. Trunk ports have the following characteristics: • By default, a trunk port is member of all VLANs (1-4094) • The VLANs that a trunk port is member of may be limited by the use of Allowed VLANs • Frames classified to a VLAN that the port is not a member of are discarded • By default, all frames but frames classified to the Port VLAN (a.k.a. Native VLAN) get tagged on egress. Frames classified to the Port VLAN do not get C-tagged on egress • Egress tagging can be changed to tag all frames, in which case only tagged frames are accepted on ingress
	<u>Hybrid:</u> Hybrid ports resemble trunk ports in many ways, but adds additional port configuration features. In addition to the characteristics described for trunk ports, hybrid ports have these abilities: • Can be configured to be VLAN tag unaware, C-tag aware, S-tag aware, or S-custom-tag aware • Ingress filtering can be controlled • Ingress acceptance of frames and configuration of egress tagging can be configured independently
Port VLAN	Determines the port's VLAN ID (a.k.a. PVID). Allowed VLANs are in the range 1 through 4094, default being 1. On ingress, frames get classified to the Port VLAN if the port is configured as VLAN unaware, the frame is untagged, or VLAN awareness is enabled on the port, but the frame is priority tagged (VLAN ID = 0). On egress, frames classified to the Port VLAN do not get tagged if Egress Tagging configuration is set to untag Port VLAN. The Port VLAN is called an "Access VLAN" for ports in Access mode and Native VLAN for ports in Trunk or Hybrid mode.
Port Type	Ports in hybrid mode allow for changing the port type, that is, whether a frame's VLAN tag is used to classify the frame on ingress to a particular VLAN, and if so, which TPID it reacts on. Likewise, on egress, the Port Type determines the TPID of the tag, if a tag is required. <u>Unaware:</u> On ingress, all frames, whether carrying a VLAN tag or not, get classified to the Port VLAN, and possible tags are not removed on egress.

	<u>C-Port:</u> On ingress, frames with a VLAN tag with TPID = 0x8100 get classified to the VLAN ID embedded in the tag. If a frame is untagged or priority tagged, the frame gets classified to the Port VLAN. If frames must be tagged on egress, they will be tagged with a C-tag. <u>S-Port:</u> On ingress, frames with a VLAN tag with TPID = 0x8100 or 0x88A8 get classified to the VLAN ID embedded in the tag. If a frame is untagged or priority tagged, the frame gets classified to the Port VLAN. If frames must be tagged on egress, they will be tagged with an S-tag.
	<u>S-Custom-Port:</u> On ingress, frames with a VLAN tag with a TPID = 0x8100 or equal to the EtherType configured for Custom-S ports get classified to the VLAN ID embedded in the tag. If a frame is untagged or priority tagged, the frame gets classified to the Port VLAN. If frames must be tagged on egress, they will be tagged with the custom S-tag.
Ingress Filter	Hybrid ports allow for changing ingress filtering. Access and Trunk ports always have ingress filtering enabled. If ingress filtering is enabled (checkbox is checked), frames classified to a VLAN that the port is not a member of get discarded. If ingress filtering is disabled, frames classified to a VLAN that the port is not a member of are accepted and forwarded to the switch engine. However, the port will never transmit frames classified to VLANs that it is not a member of.
Ingress Acceptance	Hybrid ports allow for changing the type of frames that are accepted on ingress. <u>Tagged and Untagged</u> Both tagged and untagged frames are accepted. <u>Tagged Only</u> Only tagged frames are accepted on ingress. Untagged frames are discarded. <u>Untagged Only</u> Only untagged frames are accepted on ingress. Tagged frames are discarded.
Egress Tagging	Ports in Trunk and Hybrid mode may control the tagging of frames on egress. <u>Untag Port VLAN</u> Frames classified to the Port VLAN are transmitted untagged. Other frames are transmitted with the relevant tag.

Allowed VLANs	Ports in Trunk and Hybrid mode may control which VLANs they are allowed to become members of. Access ports can only be member of one VLAN, the Access VLAN. The field's syntax is identical to the syntax used in the Enabled VLANs field. By default, a Trunk or Hybrid port will become member of all VLANs, and is therefore set to 1-4094. The field may be left empty, which means that the port will not become member of any VLANs.
Forbidden VLANs	A port may be configured to never be member of one or more VLANs. This is particularly useful when dynamic VLAN protocols like MVRP and GVRP must be prevented from dynamically adding ports to VLANs. The trick is to mark such VLANs as forbidden on the port in question. The syntax is identical to the syntax used in the Enabled VLANs field. By default, the field is left blank, which means that the port may become a member of all possible VLANs.

Click "Save" to store and active settings.

5.2 Port Isolation

Port isolation is for limiting data between ports. It is similar to VLAN, but stricter.

5.2.1 Port Group

This switch support port groups. Members of port group can forward data.

Note: port can belong to multiple port groups. Data can be forwarded among any port that belong to one port group.

After clicking "Advanced Configure" > "Port Isolation" > "Port Group", then following screen will appear for making port group configuration:

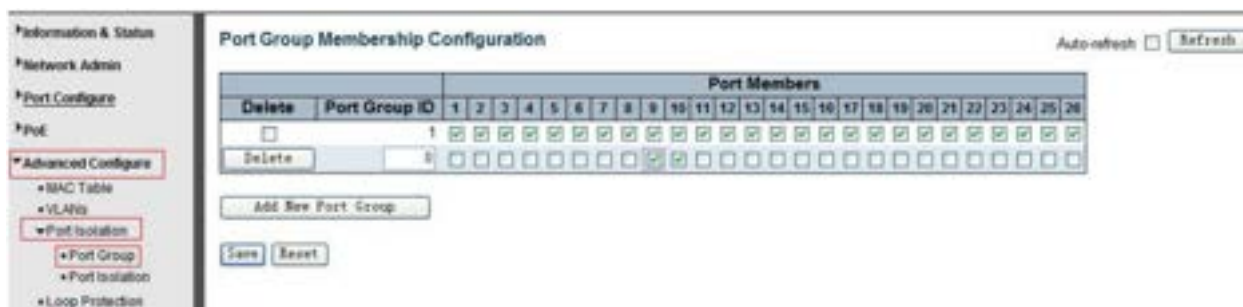


Figure 5-2 Port Group Configuration Screen

Configuration object and description is:

Object	Description
Port Members	Check the corresponding box to set them as one port group.

Click **"Add New Port Group"** to create a new port group, **"Delete"** to remove corresponding port group, and **"Save"** to store and active settings.

5.2.2 Port Isolation

After clicking **"Advanced Configure"** > **"Port Isolation"**>**"Port Isolation"**, then following screen will appear for making port isolation configuration:

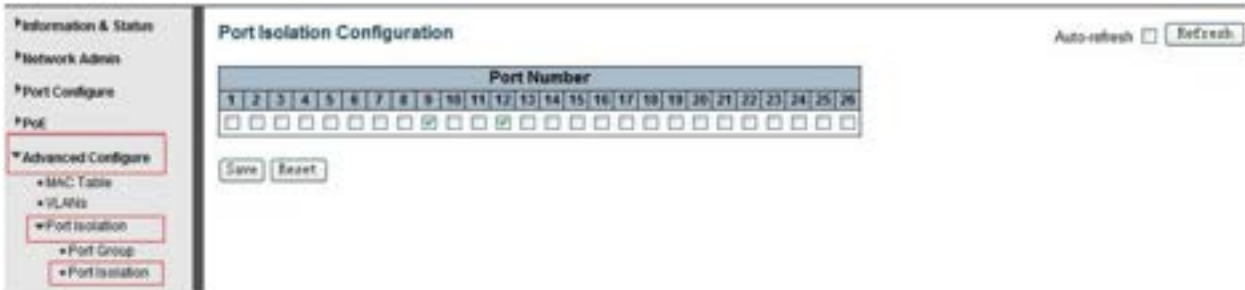


Figure 5-3 Port Isolation Configuration Screen

Configuration object and description is:

Object	Description
Port Number	Check box to set corresponding port as port isolation, so that they can not forward data flow.

Click **"Save"** to store and active settings.

5.3 STP

The Spanning Tree Protocol (STP) can be used to detect and disable network loops, and to provide backup links between switches, bridges or routers. This allows the switch to interact with other bridging devices in your network to ensure that only one route exists between any two stations on the network, and provide backup links which automatically take over when a primary link goes down.

5.3.1 STP Bridge Settings

This page allows you to configure port STP settings. After clicking **"Advanced Configure"** > **"Spanning Tree"** > **"Bridge Settings"**, following screen will appear:

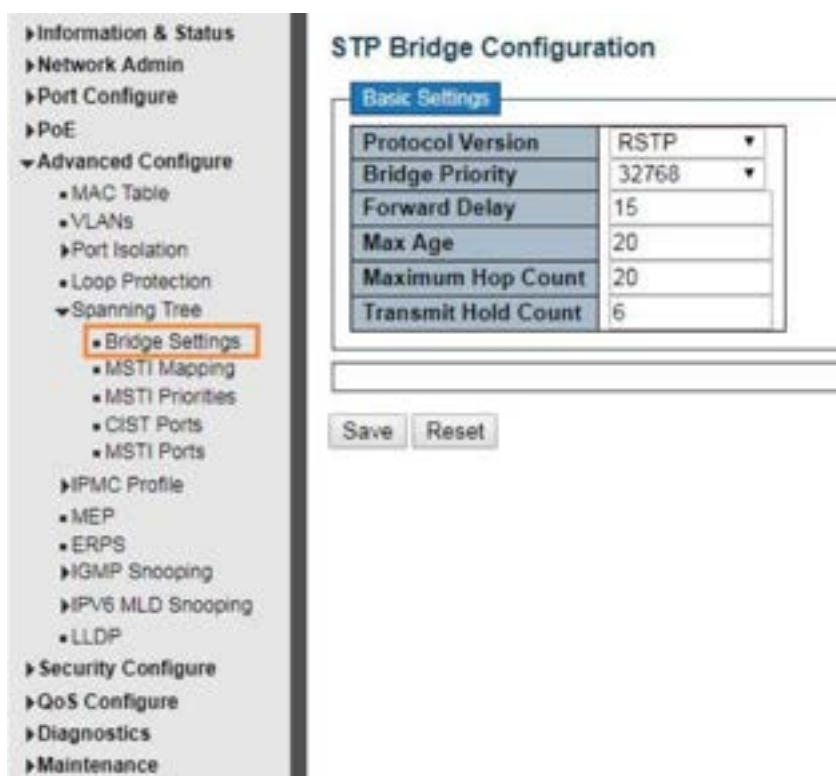


Figure 5-4 Spanning Tree Configuration Screen

Configuration object and description is:

Object	Description
Protocol Version	Click drop-down menu to select STP protocol version, including: STP - Spanning Tree Protocol (IEEE802.1D); RSTP - Rapid Spanning Tree Protocol (IEEE802.1w)
Bridge Priority	Controls the bridge priority. Lower numeric values have better priority. The bridge priority plus the MSTI instance number, concatenated with the 6-byte MAC address of the switch forms a <i>Bridge Identifier</i> .
Forward Delay (4-30)	Forward Delay setting range is from 4 to 30 seconds. Default value is 15 seconds.
Max Age (6-40)	The maximum age of the information transmitted by the Bridge when it is the Root Bridge. Valid values are in the range 6 to 40 seconds. Default value is 20 .

Maximum Hop Count (6-40)	This defines the initial value of remaining Hops for MSTI information generated at the boundary of an MSTI region. It defines how many bridges a root bridge can distribute its BPDU information. Valid values are in the range 6 to 40 hops.
Transmit Hold Count (1-10)	The number of BPDU's a bridge port can send per second. When exceeded, transmission of the next BPDU will be delayed. Valid values are in the range 1 to 10 BPDU's per second. Default value is 6.

Click **"Save"** to store and active settings.

5.3.2 MSTI Mapping

Users can set the mapping. Click **"Advanced Configure"** > **"Spanning Tree"** > **"MSTI Mapping"**.

Figure 5-3-2 MSTI Mapping Setting

Configuration Instruction:

Object	Instruction
Configuration Name	Set domain name of MSTP
Configuration Revision	Set Configuration Revision
MSTI Mapping	Input the VLAN that need mapping

Click **"Save"** to enable your settings.

Note: Please set the same value for configuration name and configuration revision of all switches in the looped network when set MSTP.

5.3.3 MSTI Priorities

Users can set MSTI priorities, click “advanced configure” > “Spanning Tree” > “MSTI Priorities”

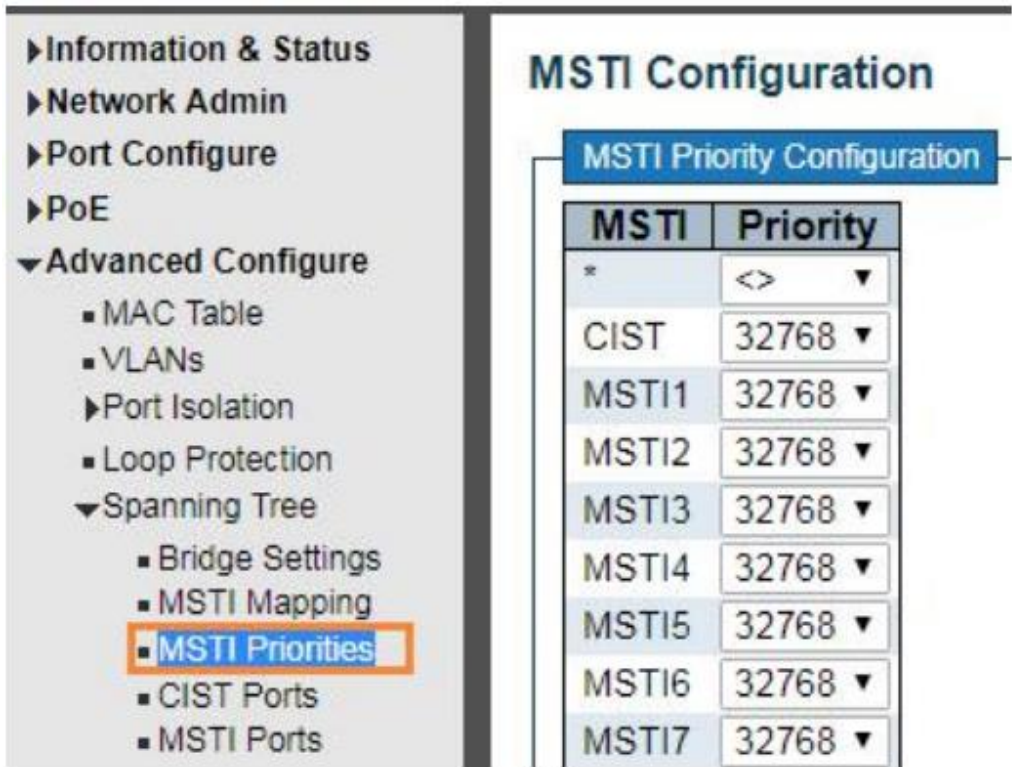


图 5-3-3 MSTI Priorities Setting

Configuration Instruction

Object	Instruction
MSTI Priorities	Set the priority, value ranges : 0-61440

Click "Save" to enable your settings.

Note: The priority value must be in multiples of 4094, at the range of 0-6144

5.3.4 STP Bridge Port

After clicking "Advanced Configure" > "Spanning Tree" > "Bridge Ports", following screen will appear:

Figure 5-5 STPConfiguration Screen

Configuration object and description is:

Object	Description
STP Enabled	Check to enable STP function.
Path Cost(0=Auto)	Controls the path cost incurred by the port. The Auto setting will set the path cost as appropriate by the physical link speed, using the 802.1D recommended values. Using the Specific setting, a user-defined value can be entered. The path cost is used when establishing the active topology of the network. Lower path cost ports are chosen as forwarding ports in favour of higher path cost ports. Valid values are in the range 1 to 200000000.
Priority	Controls the port priority. This can be used to control priority of ports having identical port cost. (See above).
Auto Edge	Check box to set corresponding port as Auto Edge.
Restricted Role	Check box to set corresponding port as Restricted Role
Restricted TCN	Check box to set corresponding port as Restricted TCN
BPDU Guide	Check box to enable BPDU Guide. So when port receives BPDU reception, it will turn to Disable(Shut Down) status.

Point-to-point	Controls whether the port connects to a point-to-point LAN rather than a shared medium. This can be automatically determined, or forced either true or false. Transition to the forwarding state is faster for point-to-point LANs than for shared media.(This applies to physical ports only. Aggregations are always forced Point2Point.
----------------	--

5.3.5 MSTI Ports

Users can set MSTI ports, click “Advanced Configure” > “Spanning Tree” > “MSTI Ports”

Figure 5-3-5 MSTI Ports Setting

Configuration Instruction:

Object	Instruction
Path Cost	Used to define a metric, representing the associated overhead of forwarding packets to a specified port list. The port overhead can be automatically set or set to a metric value. The default value is 0 (automatic). The lower the number, the more likely it is to select the port to forward the packet. Controls the path cost incurred by the port. The Auto setting will set the path cost as appropriate by the physical link speed, using the 802.1D recommended values. Using the Specific setting, a user-defined value can be entered. The path cost is used when establishing the active topology of the network. Lower path cost ports are chosen as forwarding ports in favour of higher path cost ports. Valid values are in the range 1 to 200000000.
Priority	When the port's path overhead is the same, the priority is used to decide the forwarding state of the port.

5.4 MAC Address Table

This page allows you to configure Mac address table settings. After clicking "Advanced Configure" > "Mac Table", following screen will appear.

Figure 5-6 MAC Address Table Configuration Screen

Configuration object and description is:

Object	Description
Disable Automatic Aging	If the box is checked, then the automatic aging function is disabled.
Aging Time	The time after which a learned entry is discarded. Range: 10-1000000 seconds; Default: 300 seconds.
MAC Table Learning	This switch supports 3 types for MAC Table Learning 1. Auto: port will auto learn Mac address. 2. Disable: port will NOT learn MAC address. 3. Secure: port only forward data of configured static MAC address.

Static MAC Table Configuration	The static entries in the MAC table are shown in this table. Click "Add New Static Entry" to create a new record.
--------------------------------	---

Click "Save" to store and active settings.

5.5 IGMP Snooping

Internet Group Management Protocol (IGMP) lets host and routers share information about multicast groups memberships. IGMP snooping is a switch feature that monitors the exchange of IGMP messages and copies them to the CPU for feature processing. The overall purpose of IGMP Snooping is to limit the forwarding of multicast frames to only ports that are a member of the multicast group.

5.5.1 Basic Configuration

After clicking "Advanced Configure" > "IGMP Snooping" > "Basic Configuration", following screen will appear:

Port	Router Port	Fast Leave	Throttling
*	☐	☐	<> ▼
1	☐	☐	unlimited ▼
2	☐	☐	unlimited ▼
3	☐	☐	unlimited ▼
4	☐	☐	unlimited ▼
5	☐	☐	unlimited ▼
6	☐	☐	unlimited ▼
7	☐	☐	unlimited ▼
8	☐	☐	unlimited ▼
9	☐	☐	unlimited ▼
10	☐	☐	unlimited ▼

Figure 5-7 IGMP Snooping Basic Configuration

Configuration object and description is:

Object	Description
Snooping Enabled	Enable or disable the IGMP snooping. The default value is "Disabled". Enable: check the box; Disable: do not check the box.
Unregistered IPMCv4 Flooding Enabled	Check the box to enable unregistered IPMCv4 Flooding
Router Port	Specify which ports act as router ports. A router port is a port on the Ethernet switch that leads towards the Layer 3 multicast device or <u>IGMP querier</u> . If an <u>aggregation</u> member port is selected as a router port, the whole aggregation will act as a router port.
Fast Leave	Fast leave performs deleting MAC forward entry immediately upon receiving message for group de-registration

Click "Save" to store and active settings.

5.5.2 IGMP Snooping VLAN Configuration

After clicking "Advanced Configure" > "IGMP Snooping" > "VLAN Configuration", following screen will appear:

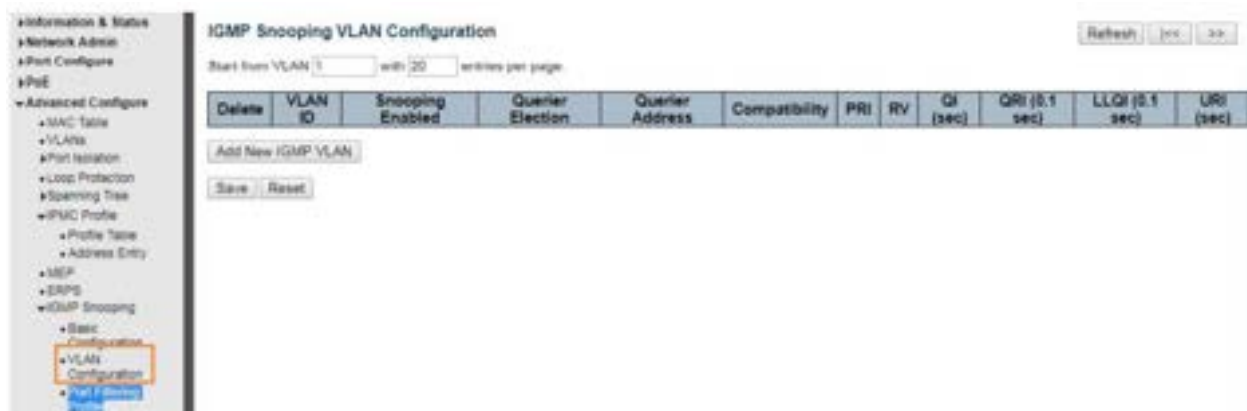


Figure 5-7 IGMP Snooping VLAN Configuration

Configuration object and description is:

Object	Description
Snooping Enabled	Enable the per-VLAN IGMP Snooping. Up to 32 VLANs can be selected for IGMP
	Snooping.
Querier Election	Enable to join IGMP Querier election in the VLAN. Disable to act as an IGMP Non-Querier.
Querier Address	Define the IPv4 address as source address used in IP header for IGMP <u>Querier election</u> . When the Querier address is not set, system uses IPv4 management address of the IP interface associated with this VLAN. When the IPv4 management address is not set, system uses the first available IPv4 management address. Otherwise, system uses a pre-defined value. By default, this value will be 192.0.2.1.

Click "Save" to store and active settings.

5.5.3 Port Filtering Profile

Set Port filtering profile, click "Advanced Configure" > "IGMP Snooping" > "Port Filtering Profile"

IGMP Snooping Port Filtering Profile Configuration

Port	Filtering Profile
1	zubo ▼
2	- ▼
3	- ▼
4	- ▼
5	- ▼
6	- ▼
7	- ▼
8	- ▼
9	- ▼
10	- ▼

Save Reset

Figure 5-5-3 Port Filtering Profile Setting

Configuration Instruction:

Object	Instruction
VLAN ID	
Enable Snooping	Enable the per-VLAN IGMP Snooping. Up to 32 VLANs can be selected for IGMP Snooping.
Querier (Querier Election)	Enable to join IGMP Querier election in the VLAN. Disable to act as an IGMP Non-Querier.
Querier (Querier Address)	Define the IPv4 address as source address used in IP header for IGMP <u>Querier election</u> . When the Querier address is not set, system uses IPv4 management address of the IP interface associated with this VLAN. When the IPv4 management address is not set, system uses the first available IPv4 management address. Otherwise, system uses a pre-defined value. By default, this value will be 192.0.2.1.

Click “Save” to enable your setting.

5.6 IPMC Profile

Users can set the filter multicast list, click “Advanced Configure” > “IPMC Profile” > “Address Entry”

Configuration Instruction:

Object	Instruction
Entry Name	Input the name of the group to be filtered
Start Address	Input the start group address
End Address	Input the end group address

Click “Save” to enable your setting

Bind the filter multicast list, click “Advanced Configure” > “IPMC Profile” > “Profile Table

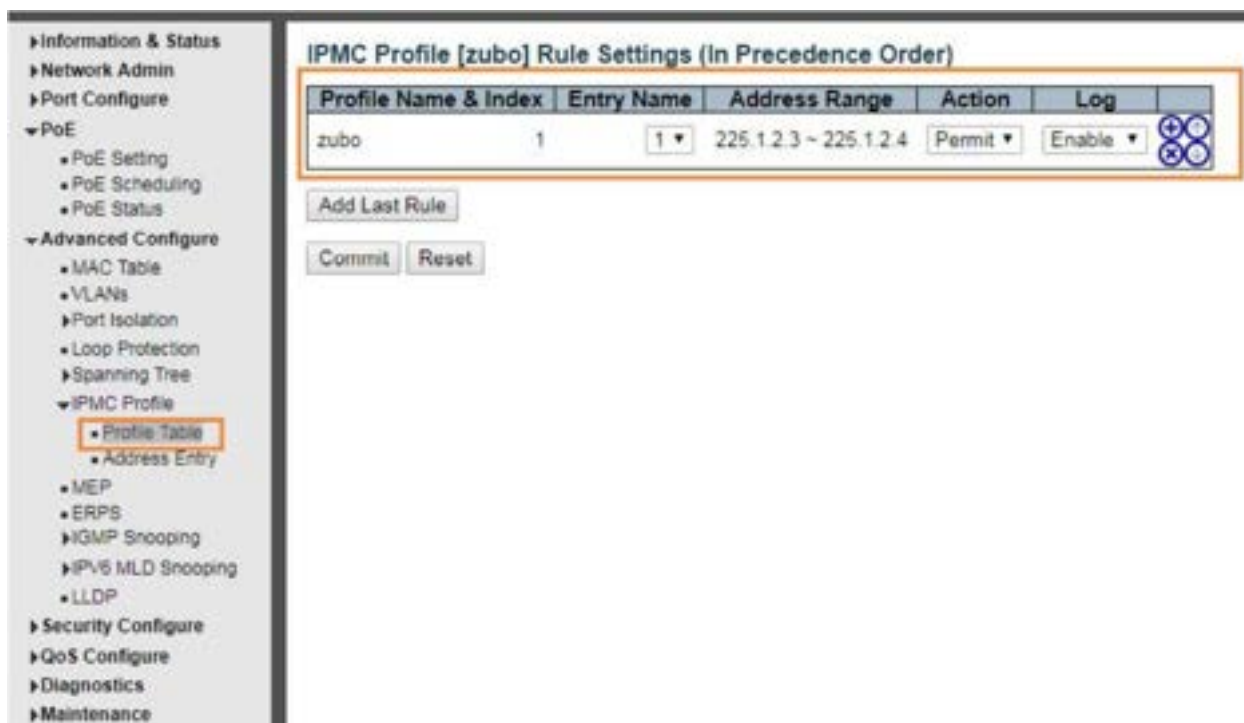


Figure 5-6 IGMP Snooping Setting

Object	Instruction
Entry Name	Choose created Address Entry by dropping down the menu.
Action	Choose Deny / Permit
Log	Enable / Disable

5.7 IPV6 MLD Snooping

IPV6 MLD Snooping is a multicast management and control mechanism working on the Layer 2 Ethernet switch. When enable IPV6 MLD Snooping, switch receives the IPV6 MLD message by listening for each interface, to exchange interface and multicast group address mapping relationship, and according to establish the mapping relationship to forward the multicast data flow.

5.7.1 Basic Configuration

Click “Advanced Configure” > “IPv6 MLD Snooping” > “Basic Configuration”, to check the configuration information of IPv6 MLD Snooping.

MLD Snooping Configuration

Global Configuration

Snooping Enabled	☐
Unregistered IPMCv6 Flooding Enabled	☒
MLD SSM Range	#3e:: / 96
Leave Proxy Enabled	☐
Proxy Enabled	☐

Port Related Configuration

Port	Router Port	Fast Leave	Throttling
*	☐	☐	<>
1	☐	☐	unlimited
2	☐	☐	unlimited
3	☐	☐	unlimited
4	☐	☐	unlimited
5	☐	☐	unlimited
6	☐	☐	unlimited
7	☐	☐	unlimited
8	☐	☐	unlimited
9	☐	☐	unlimited
10	☐	☐	unlimited

Save Reset

Figure 5-7-1 IGMP Snooping Basic Setting

Configuration Instruction:

Object	Instruction
Snooping Enable	Enable/ Disable IGMP Snooping
Unregistered IPMCv6 Flooding Enable	
Router Port	Specify which ports act as router ports. A router port is a port on the Ethernet switch that leads towards the Layer 3 multicast device or <u>MLD querier</u> . If an <u>aggregation</u> member port is selected as a router port, the whole aggregation will act as a router port.
Fast leave	Fast leavePerforms deleting MAC forward entry immediately upon receiving message for group de-registration

Click **“Save”** to enable your setting.

5.7.2 VLAN Configuration

Click **“Advanced Configure”** > **“IPv6 MLD Snooping”** > **“VLAN Configuration”**, to check configuration information of IPv6 MLD Snooping.



Figure 5-7-2 IPV6 MLD Snooping Setting

Configuration Instruction:

Object	Instruction
VLAN ID	
Snooping Enable	Enable the per-VLAN IGMP Snooping. Up to 32 VLANs can be selected for IGMP Snooping.
Querier (Querier Election)	Enable to join MLD Querier election in the VLAN. Disable to act as an MLD Non-Querier.

Click **“Save”** to enable your setting.

5.8 ERPS

ERPS (Ethernet Ring Protection Switching), it integrates OAM function and APS protocol. If the ring network was interrupted accidentally, the fault recovery times could be less than 50ms to quickly bring the network back to normal operation. ITU-T G.8032 is the first industry standard for ERPS.

Note: Before enable ERPS, STP of ring port should be disabled.

After clicking **"Advanced Configure"** > **"ERPS"** , following screen will appear:

Figure 5-8ERPSConfiguration

Configuration object and description is:

Object	Description
Ring ID	ERPS Ring ID
East Port	Number of the port which participate in this Ring protection.
West Port	Number of the other port which participate in this Ring protection.
Ring Type	Available selection: "Major Ring" or "Sub Ring". Only in case of Multi Ring application, "Sub Ring" is required to configure. Default Ring Type: "Major Ring". Only if there is multi ring application, it is required to set.
Interconnected Node	In Multi Ring application, Interconnected Node is the node that connect 2 or more rings.
Major Ring ID	In Single Ring application, Major Ring ID is same as Ring ID. In Multi Ring application, Sub Ring has to be type as Major Ring ID.
R-APS VLAN(1-4094)	Define VLAN for R - APS VLAN .

Click "**Add New Ring Group**" to create a new ERPS ring application.

Click "**Save**" to store and active settings.

After clicking the number under "Ring ID", it will go to the page for Ring Configuration as following screen:

Information & Status

Network Admin

Port Configure

Port

Advanced Configure

- MAC Table
- VLANs
- Port Isolation
- Loop Protection
- Spanning Tree
- MEP
- ERPS
- GMP Snapping
- LLDP

Security Configure

QoS Configure

Diagnostics

Maintenance

Rapid Ring Configuration 1

Auto-refresh ☐ Refresh

Instance Data

Ring ID	East Port	West Port	East Port SF MEP	West Port SF MEP	East Port APS MEP	West Port APS MEP	Ring Type
1	1	2	1	2	1	2	Major Ring

Instance Configuration

Configured	WTR(Wait to Restore) Time	Revertive	VLAN config
☒	1min	☒	VLAN Config

RPL Configuration

RPL Role	RPL Port	Clear
None	None	☐

Instance State

Protection State	East Port	West Port	Transmit APS	East Port Receive APS	West Port Receive APS	WTR Remaining	RPL Un-blocked	No APS Received	East Port Block Status	West Port Block Status	FCP Alarm
Protected	SF	OK	SF	BPRD		0	☒	☒	Blocked	Unblocked	☒

Save Reset

Figure 5-9EPRS Ring Configuration

Configuration object and description is:

Object	Description
WTR(Wait to Restore) Time(1-12)	Click Click drop-down menu to select WTR time for R-APS. Available selection: 1-12min Default: 1 min
Revertive	Check to enable Revertive status of R-APS.
VLAN config	After clicked " VLAN config ", it will go the page of Rapid Ring VLAN Configuration.
RPLRole	Click drop-down menu to select "None", "RPL Owner", or "RPL Neighbor" role.
RPL Port	Click drop-down menu to select "None", "East Port", or "West Port".

Click "Save" to store and active settings.

After clicking "**VLAN config**", it will go the page of Rapid Ring VLAN Configuration as following screen:



Figure 5-10 Rapid Ring VLAN Configuration

Click "Add New Entry" to create a new entry. Click "Save" to store and active settings.

5.9 LLDP

Link Layer Discovery Protocol (LLDP) is used to discover basic information about neighboring devices on the local broadcast domain. LLDP is a Layer 2 protocol that uses periodic broadcasts to advertise information about the sending device. Advertised information is represented in Type Length Value (TLV) format according to the IEEE 802.1ab standard, and can include details such as device identification, capabilities and configuration settings. LLDP also defines how to store and maintain information gathered about the neighboring network nodes it discovers.

After clicking "Advanced Configure" > "LLDP", following screen will appear:

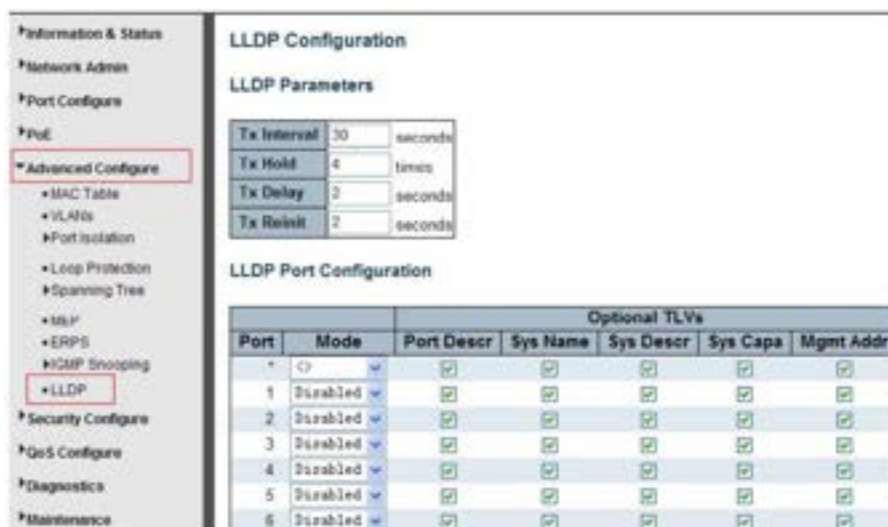


Figure 5-9 LLDP Configuration Screen

Configuration object and description is:

Object	Description
LLDP Parameters	Here allows the user to inspect and configure the current LLDP port settings: ➤ Tx Interval: Transmission Interval Time ➤ Tx Hold: Hold time Multiplier ➤ Tx Delay: Transmit Delay Time ➤ Tx Remit: Transmit Remit Time
Mode	Select LLDP messages transmit and receive modes for LLDP Protocol Data Units. Options are Tx only, Rx only, Enabled, and Disabled.
Optional TLVs	To configure the information included in the TLV field of advertised messages. When followed option is checked, corresponding information will be included in LLDP information transmitted. ➤ Port Descr: Port Description ➤ Sys Name: System Name ➤ Sys Descr: System Description ➤ Sys Capa: System Capability ➤ Mgmt Addr: Management Address

Click "Save" to store and active settings.

5.10 Loop Protection

Loop protection is to avoid broadcast loops. After clicking "Advanced Configure" > "Loop Protection", following screen will appear:

Loop Protection Configuration

General Settings

Global Configuration

Enable Loop Protection	Disable
Transmission Time	5 seconds
Shutdown Time	180 seconds

Port Configuration

Port	Enable	Action	Tx Mode
*	☐	☐ ☐	☐ ☐
1	☐	Shutdown Port	Enable
2	☐	Shutdown Port and Log	Disable
3	☐	Log Only	Enable

Figure 5-10 Loop Protection Configuration Screen

Object	Description
Global Configuration	Enable Loop Protection: click drop-down menu to disable or enable Loop Protection; Transmission Time: enter a number to set Loop ProtectionInterval Time; Shutdown Time: enter a number to set port Shutdown Time.
Enable	Check to enable corresponding port loop protection.
Action	Action take when the port detected loop. There are 3 types of action for users to select, Shutdown port, Shutdown port and Log, Log Only.
Tx Mode	To enable or disable Tx.

Click "Save" to store and active settings.

6. QoS Configuration

Quality of Service (QoS) is an advanced traffic prioritization feature that allows you to establish control over network traffic. QoS enables you to assign various grades of network service to different types of traffic, such as multi-media, video, protocol-specific, time critical, and file-backup traffic. This function n can not only reserve bandwidth, but also limit other traffic that is not so important.

6.1 QoS Port Classification

After clicking "QoS Configure" > "Port Classification", following screen will appear:

QoS Ingress Port Classification

Port	CoS	DPL	PCP	DEI	Address Mode
*	<>	<>	<>	<>	<>
1	0	0	0	1	Source
2	1	1	1	0	Destination
3	2	0	2	0	Source
4	3	0	3	0	Destination
5	4	0	4	0	Source
6	5	0	5	0	Source
7	6	0	6	0	Source
8	7	0	7	0	Source

Figure 6-1 Port Classification Configuration Screen

Configuration object and description is:

Object	Description
CoS	Controls the default class of service, ranging from 0 (lowest) to 7 (highest). All frames are classified to a CoS. There is a one to one mapping between CoS, queue and priority. A CoS of 0 (zero) has the lowest priority The classified CoS can be overruled by a QCL entry. Note: If the default CoS has been dynamically changed, then the actual default CoS is shown in parentheses after the configured default CoS.
DPL	Controls the default drop precedence level. All frames are classified to a drop precedence level. The classified DPL can be overruled by a QCL entry.
PCP	Controls the default PCP value. All frames are classified to a PCP value. If the port is VLAN aware and the frame is tagged, then the frame is classified to the PCP value in the tag. Otherwise the frame is classified to the default PCP value.
DEI	Controls the default DEI value. All frames are classified to a DEI value. If the port is VLAN aware and the frame is tagged, then the frame is classified to the DEI value in the tag. Otherwise the frame is classified to the default DEI value.
Address Mode	The IP/MAC address mode specifying whether the QCL classification must be based on source (SMAC/SIP) or destination (DMAC/DIP) addresses on this port. The allowed values are: Source: Enable SMAC/SIP matching. Destination: Enable DMAC/DIP matching.

Click "Save" to store and active settings.

6.2 Port Policing

After clicking "QoS Configure" > "Port Policing", following screen will appear:

Port	Enabled	Rate	Unit	Flow Control
*	☐	500	<>	☐
1	☒	500	kbps	☒
2	☐	500	Mbps	☐
3	☒	500	fps	☒
4	☐	500	kfps	☐
5	☐	500	kbps	☐
6	☐	500	kbps	☐

Figure 6-2Port PolicingConfiguration Screen

Configuration object and description is:

Object	Description
Enabled	Check the box ☐ to enable Port Policing.
Rate	Controls the rate for the policer. The default value is 500. This value is restricted to 100-1000000 when the "Unit" is "kbps" or "fps", and it is restricted to 1-3300 when the "Unit" is "Mbps" or "kfps".
Unit	Controls the unit of measure for the policer rate as kbps, Mbps, fps or kfps . The default value is "kbps".
Flow Control	If flow control is enabled and the port is in flow control mode, then pause frames are sent instead of discarding frames.

Click "Save" to store and active settings.

6.3 Storm Control Configuration

After clicking "QoS Configure" > "Storm Control", following screen will appear:

Frame Type	Enable	Rate (pps)
Unicast	☐	1
Multicast	☒	1024K
Broadcast	☐	256K

Save Reset

Figure 6-3Port PolicingConfiguration Screen

Configuration object and description is:


Object	Description
Frame Type	This switch supports 3 kinds of Frame Type: Unicast, Unknown Multicast, Broadcast.
Enable	Check the box to enable Storm Control.
Rate(pps)	The rate unit is packets per second (pps). Valid values are:1, 2, 4, 8, 16, 32, 64, 128, 256, 512, 1K, 2K, 4K, 8K, 16K, 32K, 64K, 128K, 256K, 512K or 1024K..

Click "Save" to store and active settings.

7. Security Configuration

7.1 Password

To change system login password of the switch, please click "**Security Configure**" > "**Password**".

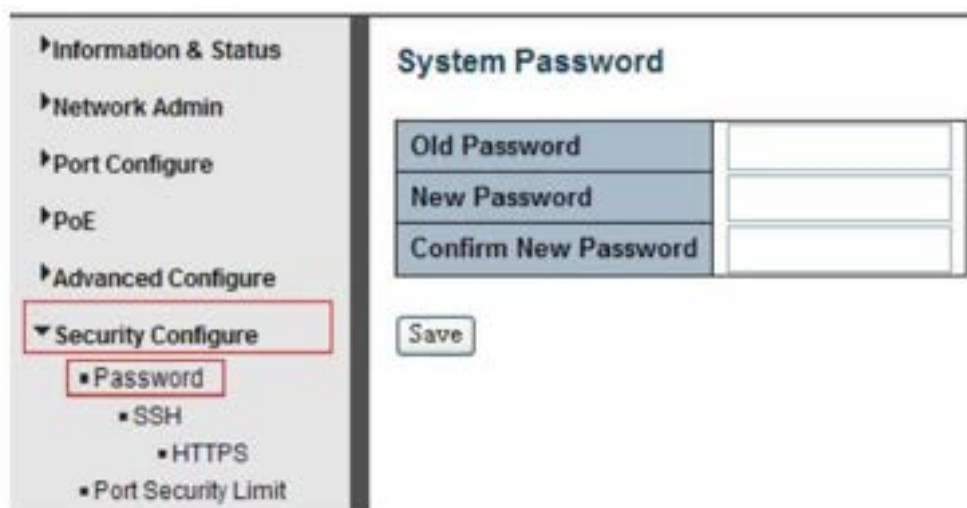

The screenshot displays the 'System Password' configuration interface. On the left, a navigation menu lists various system settings, with 'Security Configure' expanded to show sub-options like 'Password', 'SSH', 'HTTPS', and 'Port Security Limit'. The 'Password' option is highlighted. The main content area, titled 'System Password', features three text input fields for 'Old Password', 'New Password', and 'Confirm New Password'. A 'Save' button is positioned below these fields.

Figure 7-1 System Password Configuration Screen

Click "**Save**" to store and active settings.

7.2 802.1X

In the 802.1X-world, the user is called the supplicant, the switch is the authenticator, and the RADIUS server is the authentication server. The switch acts as the man-in-the-middle, forwarding requests and responses between the supplicant and the authentication server.

Frames sent between the supplicant and the switch are special 802.1X frames, known as EAPOL (EAP over LANs) frames. EAPOL frames encapsulate EAP PDUs (RFC3748). Frames sent between the switch and the RADIUS server are RADIUS packets.

RADIUS packets also encapsulate EAP PDUs together with other attributes like the switch's IP

address, name, and the supplicant's port number on the switch. EAP is very flexible, in that it allows for different authentication methods, like MD5-Challenge, PEAP, and TLS. The important thing is that the authenticator (the switch) doesn't need to know which authentication method the supplicant and the authentication server are using, or how many information exchange frames are needed for a particular method. The switch simply encapsulates the EAP part of the frame into the relevant type (EAPOL or RADIUS) and forwards it.

When authentication is complete, the RADIUS server sends a special packet containing a success or failure indication. Besides forwarding this decision to the supplicant, the switch uses it to open up or block traffic on the switch port connected to the supplicant.

The IEEE 802.1X standard defines a client-server-based access control and authentication protocol that restricts unauthorized clients from connecting to a LAN through publicly accessible ports. The authentication server authenticates each client connected to a switch port before making available any services offered by the switch or the LAN.

Until the client is authenticated, 802.1X access control allows only Extensible Authentication Protocol over LAN (EAPOL) traffic through the port to which the client is connected. After authentication is successful, normal traffic can pass through the port.

This switch supports 802.1X port-based authentication. In this page, user can configure 802.1X. After clicking "**Security Configure**" > "**802.1X**", following screen will appear:

Port	Admin State	Port State	Restart
1	Force Authorized	Globally Disabled	Force Authorized
2	Force Authorized	Globally Disabled	Force Authorized
3	Force Authorized	Globally Disabled	Force Authorized
4	Force Authorized	Globally Disabled	Force Authorized

Figure 7-2 802.1X Configuration Screen

Configuration object and description is:


Object	Description
System Configuration	Here, user can enable or disable 802.1X or Re-authentication, as well as set Re-authentication Period / EAPOL Timeout / Aging Period / Hold Time
Port Configuration	Click drop-down menu to select a Admin State. Available options: Force Authorized, Force Unauthorized, 802.1X, Mac-based Auth.

Click "Save" to store and active settings.

7.3 DHCP Snooping

7.3.1 DHCP Overview

DHCP protocol is widely used to dynamically allocate reusable network resources, such as IP address. Typical process of DHCP to obtain IP is as following:

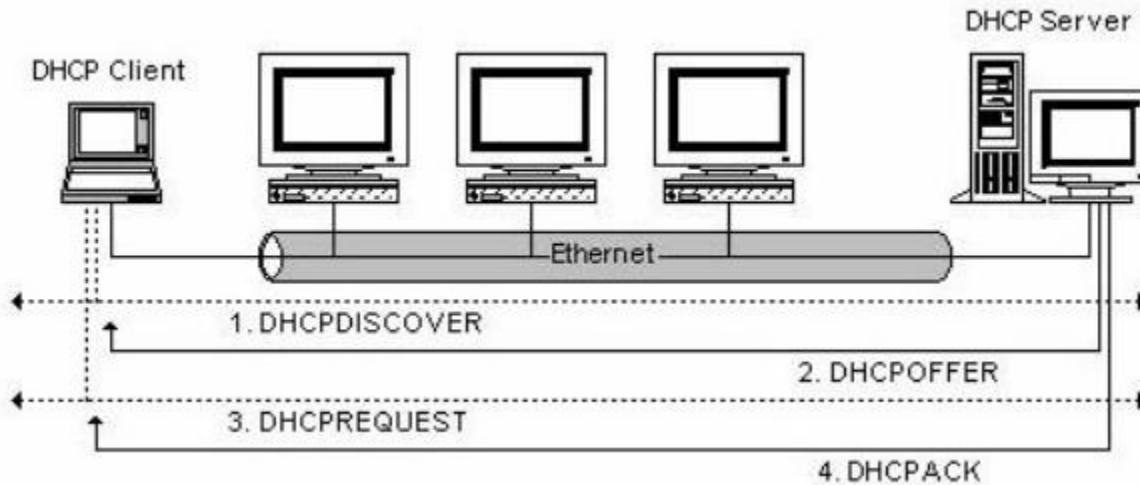

DHCP Client sent DHCP DISCOVER message to DHCP Server, if Client did not receive respond from server within a period of time, it will resend DHCP DISCOVER message. After received DHCP DISCOVER message, DHCP Server will assign sources (IP address for example) to client, and then send DHCP OFFER message to DHCP client.

After received DHCP OFFER message, DHCP Client send DHCP REQUEST to ask for server lease, and notify the other servers that it has accepted this server to assign addresses.

After received DHCP REQUEST, server will verify whether resource can be allocated. If OK, it will send DHCP ACK message; If not OK, it will send DHCP NAK message. After receiving DHCP ACK message, start using the source which server assigned. If received DHCP NAK, DHCP Client will resend DHCP DISCOVER message.

7.3.2 About DHCP Snooping

The addresses assigned to DHCP clients on insecure ports can be carefully controlled using the dynamic bindings registered with DHCP Snooping. DHCP snooping allows a switch to protect a network from rogue DHCP servers or other devices which send port-related information to a DHCP server. This information can be useful in tracking an IP address back to a physical port.

Command Usage:

- Network traffic may be disrupted when malicious DHCP messages are received from an outside source. DHCP snooping is used to filter DHCP messages received on a non-secure interface from outside the network or firewall. When DHCP snooping is enabled globally and enabled on a VLAN interface, DHCP messages received on an untrusted interface from a device not listed in the DHCP snooping table will be dropped.
- Table entries are only learned for trusted interfaces. An entry is added or removed

dynamically to the DHCP snooping table when a client receives or releases an IP address from a DHCP server. Each entry includes a MAC address, IP address, lease time, VLAN identifier, and port identifier.

- When DHCP snooping is enabled, DHCP messages entering an untrusted interface are filtered based upon dynamic entries learned via DHCP snooping.
- If a DHCP packet from a client passes the filtering criteria, it will only be forwarded to trusted ports in the same VLAN.
- If a DHCP packet is from server is received on a trusted port, it will be forwarded to both trusted and untrusted ports in the same VLAN.
- If DHCP snooping is globally disabled, all dynamic bindings are removed from the binding table.

7.3.3 DHCP Snooping Configuration

After clicking "Security Configure" > "DHCP" > "Snooping Setting", following screen will appear:

DHCP Snooping Configuration

Snooping Mode: Enabled

Port Mode Configuration

Port	Mode
*	<>
1	Trusted
2	Untrusted
3	Trusted
4	Trusted
5	Trusted
6	Untrusted
7	Trusted
8	Trusted
9	Trusted
10	Trusted

Figure 7-3DHCP Snooping Configuration Screen

Configuration object and description is:

Object	Description
DHCP Snooping Mode	Click drop-down menu to enable or disable DHCP Snooping
Port Mode	Indicates the DHCP snooping port mode. Possible port modes are: Trusted: Configures the port as trusted source of the DHCP messages. Untrusted: Configures the port as untrusted source of the DHCP messages.

Click **"Save"** to store and active settings.

7.4 IP & MAC Source Guard

IP & MAC Source Guard is a secure feature used to restrict IP traffic on DHCP snooping untrusted ports by filtering traffic based on DHCP Snooping Table or manually configured IP Source Bindings. It helps prevent IP spoofing attacks when a host tries to spoof and use the IP address of another host.

7.4.1 Port Configuration

In this page, user can make IP & MAC Source Guard Port Configuration. After clicking **"Security Configure" > "IP & MAC Source Guard" > "Configuration"**, following screen will appear:

IP Source Guard Configuration

Mode: Disabled

Translate dynamic to static

Port Mode Configuration

Port	Mode	Max Dynamic Clients
*	<>	<>
1	Disabled	Unlimited
2	Disabled	Unlimited
3	Disabled	Unlimited
4	Disabled	Unlimited
5	Disabled	Unlimited
6	Disabled	Unlimited
7	Disabled	Unlimited

Figure 7-4 IP&MAC Guard- Port Configuration Screen

Configuration object and description is:

Object	Description
Global Mode	Click drop-down menu to enable or disable Global IP&MAC Source Guard function
Port Mode	Click drop-down menu to enable or disable the IP&MAC Source Guard function for corresponding port.
Max Dynamic Clients	Click drop-down menu to select Max Dynamic Clients. Available options: Unlimited, 0, 1, 2.

Click "Save" to store and active settings.

7.4.2 Static Table

In this page, user can manually set Static Table of IP & MAC Guard to fulfill controlling function to port. After clicking "Security Configure" > "IP & MAC Source Guard" > "Static Table", followed screen will appear:

The screenshot displays the 'Static IP Source Guard Table' configuration interface. On the left, a sidebar menu lists various configuration options, with 'Security Configure' expanded to show 'IP&MAC Source Guard' and 'Static Table' selected. The main content area features a table with the following structure:

Delete	Port	VLAN ID	IP Address	MAC address
Delete	1			

Below the table, there is an 'Add New Entry' button. At the bottom of the configuration area, there are 'Save' and 'Reset' buttons.

Figure 7-5 Static Table Configuration Screen

Configuration object and description is:

Object	Description
Port	Click drop-down menu to select which port should be fixed.
VLAN	Type VLAN ID that should be fixed to
IP Address	Type IP Address that should be fixed to
MAC Address	Type Mac Address that should be fixed to

Click "Add New Entry" button to create a new record.

Click "**Save**" to store and active settings.

7.5 ARP Inspection

Dynamic ARP Inspection (DAI) is a secure feature. Several types of attacks can be launched against a host or devices connected to Layer 2 networks by "poisoning" the ARP caches. This feature is used to block such attacks. Only valid ARP requests and responses can go through DUT. A Dynamic ARP prevents the untrust ARP packets based on the DHCP Snooping Database. This page provides ARP Inspection related configuration.

7.5.1 Port Configuration

User can make port configuration in this page. After clicking "**Security Configure**" > "**ARP Inspection**" > "**Port Configuration**", following screen will appear:

Port	Mode	Check VLAN	Log Type
*	<>	<>	<>
1	Disabled	Disabled	None
2	Disabled	Disabled	None
3	Disabled	Disabled	None
4	Disabled	Disabled	None
5	Disabled	Disabled	None
6	Disabled	Disabled	None
7	Disabled	Disabled	None
8	Disabled	Disabled	None

Figure 7-6 ARP Inspection Port Configuration Screen

Configuration object and description is:

Object	Description
Global Mode	Click drop-down menu to enable or disable Global ARP Inspection
Port Mode	Click drop-down menu to enable or disable port-based ARP Inspection
Check VLAN	If you want to inspect the VLAN configuration, you have to enable the setting of "Check VLAN". The default setting of "Check VLAN" is disabled. When the setting of "Check VLAN" is disabled, the log type of ARP Inspection will refer to the port setting. And the setting of "Check VLAN" is enabled, the log type of ARP Inspection will refer to the VLAN setting. Possible setting of "Check VLAN" are: Enabled: Enable check VLAN operation. Disabled: Disable check VLAN operation.
Log Type	Only the Global Mode and Port Mode on a given port are enabled, and the setting of "Check VLAN" is disabled, the log type of ARP Inspection will refer to the port setting. There are four log types and possible types: None: Log nothing. Deny: Log denied entries. Permit: Log permitted entries. ALL: Log all entries.

Click "Save" to store and active settings.

7.5.2 VLAN Configuration

After clicking "Security Configure" > "ARP Inspection" > "VLAN Configuration", following screen will appear:

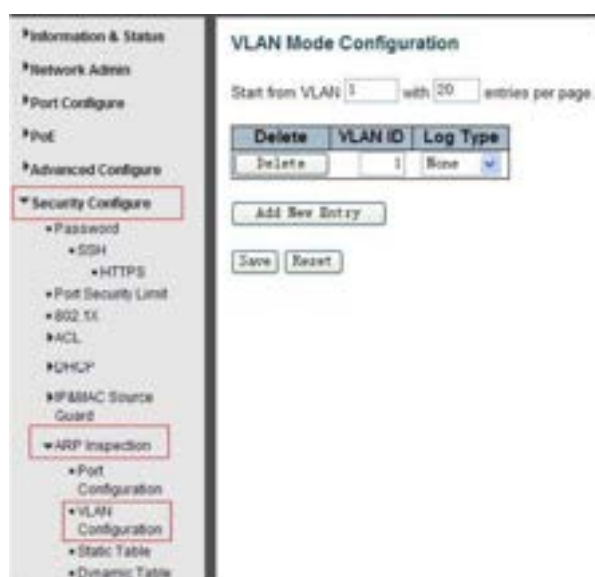


Figure 7-8 ARP Inspection VLAN Configuration Screen

Configuration object and description is:

Object	Description
VLAN ID	Indicates the ID of this particular VLAN
Log Type	Click drop-down menu to enable or disable port-based ARP Inspection. Specify ARP Inspection is enabled on which VLANs. First, you have to enable the port setting on Port mode configuration web page. Only when both Global Mode and Port Mode on a given port are enabled, ARP Inspection is enabled on this given port. Second, you can specify which VLAN will be inspected on VLAN mode configuration web page. The log type also can be configured on per VLAN setting. Possible types are: None: Log nothing. Deny: Log denied entries. Permit: Log permitted entries. ALL: Log all entries.

Click "Add New Entry" button to create a new record of VLAN configuration. Click "Save" to store and active settings.

7.5.3 Static Table

User can manually configure ARP Inspection Static Table to control port. After clicking "Security Configure" > "ARP Inspection" > "Static Table", following screen will appear:

The screenshot shows the 'Static ARP Inspection Table' configuration interface. On the left, a sidebar menu lists various configuration options, with 'Security Configure' expanded to show 'ARP Inspection' and 'Static Table' selected. The main panel displays a table with the following structure:

Delete	Port	VLAN ID	MAC Address	IP Address
<button>Delete</button>	1			

Below the table, there is an 'Add New Entry' button and 'Save' and 'Reset' buttons.

Figure 7-9 Static Table Configuration Screen

Object	Description
Port	Click drop-down menu to select which port should be fixed.
VLAN	Type VLAN ID that should be fixed to
IP Address	Type IP Address that should be fixed to
MAC Address	Type Mac Address that should be fixed to

Click "Add New Entry" button to create a new record Click "Save" to store and active settings.

7.6 ACL

ACL is an acronym for Access Control List. It is the list table of ACEs, containing access control entries that specify individual users or groups permitted or denied to specific traffic objects, such as a process or a program. Each accessible traffic object contains an identifier to its ACL. The privileges determine whether there are specific traffic object access rights.

ACL implementations can be quite complex, for example, when the ACEs are prioritized for the various situation. In networking, the ACL refers to a list of service ports or network services that are available on a host or server, each with a list of hosts or servers permitted or denied to use the service. ACL can generally be configured to control inbound traffic, and in this context, they are similar to firewalls.

7.6.1 ACL Ports Configure

After clicking "Security Configure" > "ACL" > "Ports", following screen will appear:

Port	Policy ID	Action	Rate Limiter ID	Port Redirect	Mirror	Logging	Shutdown	State	Counter
1	0	Permit	Disabled	Port 1 Port 2 Port 3	Disabled	Disabled	Disabled	Enabled	0
2	0	Permit	Disabled	Port 1 Port 2	Disabled	Disabled	Disabled	Enabled	247562
3	0	Permit	Disabled	Port 1 Port 2	Disabled	Disabled	Disabled	Enabled	0
4	0	Permit	Disabled	Port 1 Port 2	Disabled	Disabled	Disabled	Enabled	0
5	0	Permit	Disabled	Port 1	Disabled	Disabled	Disabled	Enabled	0

Figure 7-10 ACL Ports Configuration Screen

Configuration object and description is:

Object	Description
Action	There are 2 available options: Permit: that specific port allows data going through. Deny: that specific port forbid data going through.
Rate LimiterID	Port's fixed Rate Limiter ID, please go to Rate Limiter Configuration for more details.
Port Redirect	Select which port frames are redirected on. The allowed values are Disabled or a specific port number and it can't be set when action is permitted. The default value is "Disabled".
Mirror	Specify the mirror operation of this port. The allowed values are: Enabled: Frames received on the port are mirrored. Disabled: Frames received on the port are not mirrored.
	The default value is "Disabled".
Logging	Enabled or Disabled Log
Shut Down	Specify the port shut down operation of this port. The allowed values are: Enabled: If a frame is received on the port, the port will be disabled. Disabled: Port shut down is disabled. The default value is "Disabled". Note: The shutdown feature only works when the packet length is less than 1518(without VLAN tags).
State	Specify the port state of this port. The allowed values are: Enabled: To reopen ports by changing the volatile port configuration of the ACL user module. Disabled: To close ports by changing the volatile port configuration of the ACL user module. The default value is "Enabled".
Counter	Counts the number of frames that match this rule.

Click "Save" to store and active settings.

7.6.2 Rate Limiter Configuration

User can make ACL Rate limiter configuration in this page. After clicking "**Security Configure**" > "**ACL**" > "**Rate Limiter**", following screen will appear:



Figure 7-11 ACL Rate Limiters Configuration Screen

Click **"Save"** to store and active settings.

7.6.3 Access Control List Configuration

User can make Access Control List Configuration in this page. After clicking **"Security Configure"** > **"ACL"** > **"Access Control List"**, following screen will appear:



Figure 7-12 Access Control List Configuration Screen


Click  button, to go to Access Control List, and edit it.

8. Diagnostics

8.1 Ping Test

Ping is a little program that can issue ICMP Echo packets to the IP address you defined. Destination node will respond to those packets sent from switch. So, Ping test is to troubleshoot IP connectivity issues.

After clicking "**Diagnostics**" > "**Ping**", followed screen appears:

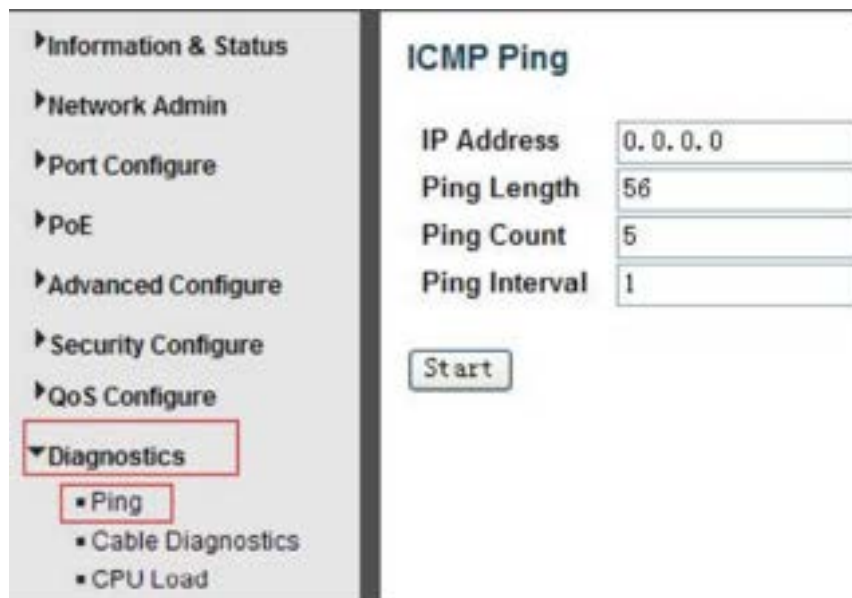

The screenshot shows a web interface for configuring a ping test. On the left is a navigation menu with the following items: Information & Status, Network Admin, Port Configure, PoE, Advanced Configure, Security Configure, QoS Configure, Diagnostics (highlighted with a red box), and its sub-items: Ping (highlighted with a red box), Cable Diagnostics, and CPU Load. The main content area is titled 'ICMP Ping' and contains four input fields: 'IP Address' with the value '0.0.0.0', 'Ping Length' with '56', 'Ping Count' with '5', and 'Ping Interval' with '1'. Below these fields is a 'Start' button.

Figure 8-1 Ping Test Screen

Configuration object and configuration is:


Object	Description
IP Address	The destination IP Address that needed to Ping
Ping Length	Input a number between 1 and 1452. Default: 56
Ping Count	The times for inputting Ping IPv4 address or IPv6 address (Number of echo requests to send). User can input a number between 1 and 60.
Ping Interval	Interval time for Ping (Send interval for each ICMP packet)

Click "**Start**" button to start Ping testing.

8.2 Cable Diagnostics

The Cable Diagnostics performs tests on 10/100/1000BASE-Tcopper cables. These functions have the ability to identify the cable length and operating conditions, and to isolate a variety of common faults that can occur on the Cat5 twisted-pair cabling.

After clicking "**Diagnostics**" > "**Cable Diagnostics**", following screen will appear:

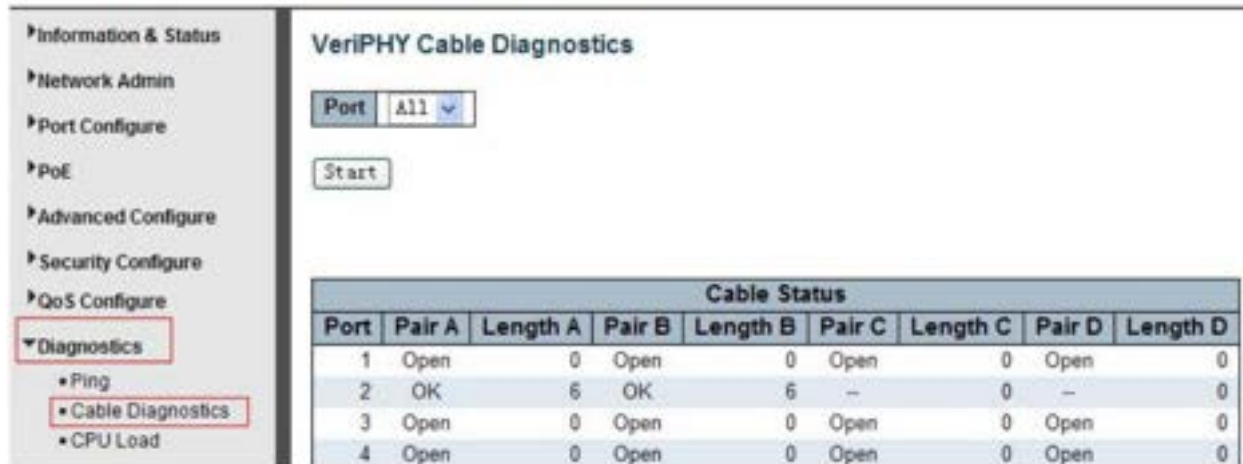

Cable Status								
Port	Pair A	Length A	Pair B	Length B	Pair C	Length C	Pair D	Length D
1	Open	0	Open	0	Open	0	Open	0
2	OK	6	OK	6	—	0	—	0
3	Open	0	Open	0	Open	0	Open	0
4	Open	0	Open	0	Open	0	Open	0

Figure 8-2 Cable Diagnostics Screen

Click "**Start**" button to start "**Cable Diagnostics**" testing.

8.3 CPU Load

This page shows percent of CPU load. After clicking "**Diagnostics**" > "**CPU Load**", following screen will appear:

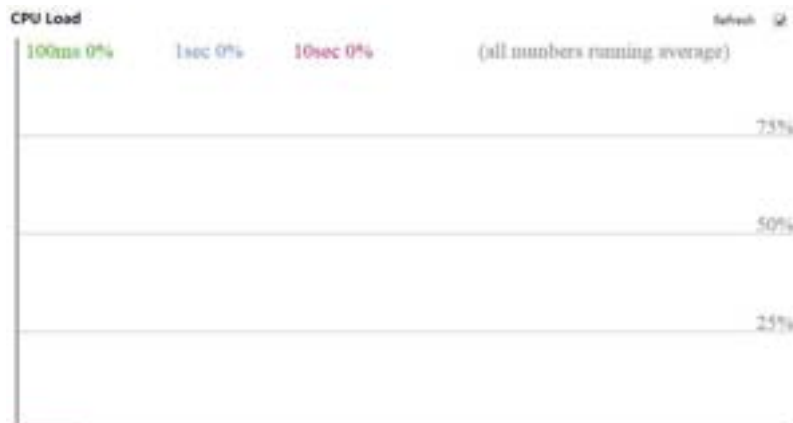


Figure 8-3 CPU Load Screen

9. System Default

9.1 Restart Device

This page is for restarting switch. After clicking "Maintenance" > "Restart Device", following screen will appear:



Please click "Yes" to restart the switch.

9.2 Factory Default

This page is for making all settings to factory defaults. After clicking "Maintenance" > "Factory Defaults", following screen will appear:



Please click "Yes" to reset the configuration to Factory Defaults.

9.3 Firmware Upgrade

This page is for upgrading system firmware. After clicking "**Maintenance**" > "**Firmware Upgrade**", following screen will appear:



Please click "**Browse**" to select the firmware that needed to upgrade. And then click "**Upload**" to start upgrading.

9.4 Firmware Select

This page is for upgrading system firmware. After clicking "**Maintenance**" > "**Firmware Select**", following screen will appear:

Information & Status

Network Admin

Port Configure

PoE

Advanced Configure

Security Configure

QoS Configure

Diagnostics

Maintenance

- Restart Device
- Factory Defaults
- Firmware Upgrade
- Firmware Select**
- Configuration

Software Image Selection

Active Image	
Image	managed
Version	24GF-4G (standalone) V1.1-ONV-20150401
Date	2015-07-15T14:55:28+08:00

Alternate Image	
Image	managed.bk
Version	24GF-4G (standalone) V1.1-ONV-20150401
Date	2015-06-11T21:44:05+08:00

Activate Alternate Image Cancel

Please click "**Activate Alternate Image**" to select the firmware.

In this page, user can download, upload, activated or delete configuration files.

9.4.1 Download Configuration File

After clicking "**Maintenance**" > "**Download**", following screen will appear:

Information & Status

Network Admin

Port Configure

PoE

Advanced Configure

Security Configure

QoS Configure

Diagnostics

▼ Maintenance

- Restart Device
- Factory Defaults
- Firmware Upgrade
- Firmware Select
- ▼ Configuration
- Download

Download Configuration

Select configuration file to save.

Please note: running-config may take a while to prepare for download.

File Name
☐ running-config
☐ default-config

Download Configuration

9.4.2 Upload Configuration File

After clicking "Maintenance" > "Upload", following screen will appear. Then user can upload Configuration File.

Information & Status

Network Admin

Port Configure

PoE

Advanced Configure

Security Configure

QoS Configure

Diagnostics

▼ Maintenance

- Restart Device
- Factory Defaults
- Firmware Upgrade
- Firmware Select
- ▼ Configuration
- Download
- Upload

Upload Configuration

File To Upload

Destination File

File Name	Parameters
-----------	------------

Upload Configuration

9.4.3 Activate Configuration

After clicking "Maintenance" > "Activate", following screen will appear. Then user can activate Configuration File.

The screenshot shows a web interface with a left sidebar and a main content area. The sidebar contains a tree view with the following items: Information & Status, Network Admin, Port Configure, PoE, Advanced Configure, Security Configure, QoS Configure, Diagnostics, Maintenance (highlighted with a red box), Configuration (highlighted with a red box), Download, Upload, Activate (highlighted with a red box), and Delete. The main content area is titled 'Activate Configuration' and contains the following text: 'Select configuration file to activate. The previous configuration will be completely replaced, potentially leading to loss of management connectivity. Please note: The activated configuration file will not be saved to startup-config automatically.' Below this text is a 'File Name' label, a radio button, and the text 'default-config'. At the bottom of the main content area is a button labeled 'Activate Configuration'.

9.4.4 Delete Configuration File

After clicking "Maintenance" > "Delete", following screen will appear. Then user can delete Configuration File.

The screenshot shows a web interface with a left sidebar and a main content area. The sidebar contains a tree view with the following items: Information & Status, Network Admin, Port Configure, PoE, Advanced Configure, Security Configure, QoS Configure, Diagnostics, Maintenance (highlighted with a red box), Configuration (highlighted with a red box), Download, Upload, Activate, and Delete (highlighted with a red box). The main content area is titled 'Delete Configuration File' and contains the following text: 'No files available for deletion.' Below this text is a button labeled 'Delete Configuration File'.

10. Appendix 1 Term List

	English Name	Description
A	ARP (Address Resolution Protocol)	A protocol that converts an IP address to a physical address
	Auto-Negotiation	To automatically negotiate the working rate and duplex mode on both ends of the switch and other equipment
B	Broadcast Storm	Excessive broadcast frames are sent across the network via a single port. The response to forward information will stack up in the network, consume excessive network resources, or cause network timeouts
	Broadcasting	The forwarding of data to all nodes in the network
C	CoS (Class of Service)	The 802.1p priority scheme. The CoS provides a way to add a priority label to the packet and divides the message into eight levels. Range of values: 0 ~ 7
D	DHCP (Dynamic Host Configuration Protocol)	The IP address, subnet mask, gateway and other information are distributed dynamically in the network
	DSCP (DiffServe Code Point)	In a six-bit domain encapsulated in the IP header, the message can be divided into 64 levels. Value range: 0 ~ 63
E	Ethernet	Ethernet USES a total line or star topology and supports a transmission rate of 10Mbps. The new version, called fast Ethernet, can be up to 100Mbps.
F	Flow Control	Flow control enables low-speed equipment to communicate with high speed devices. This kind of flow control is the way to suspend the bag through high speed port to match the speed of the high speed port and the speed of the low-speed port
	Frame	A packet containing the header and tail information required for the physical medium layer.
	Full-Duplex	Using the IEEE802.3x standard, you can simultaneously receive and send data operations in both directions at one time
H	Half-Duplex	Using the Backpressure standard, you can only receive or send a data operation in one direction at a time
I	IGMP (Internet Group Management Protocol)	The mechanism of establishing and maintaining the relationship between the host and three layer multicast equipment is provided
	IEEE 802.1p	
	IEEE 802.1q	

Q	QoS (Quality of Service)	A technique used to solve problems such as network latency and congestion
T	Trunking	A group of ports is bundled together to form an aggregate group to increase the bandwidth and enhance the reliability of the connection
	ToS (Type of Service)	In an 8-bit domain encapsulated in the IP header, a message representing different priority characteristics is represented
U	UDP (User Datagram Protocol)	An unconnected, unreliable transport layer protocol
	UTP(Unshielded Twisted Pair)	There is no shielding media outside the double strand

11. Appendix 2 FAQ

1. Why is it not normal to display a page through a WEB browsing configuration?

A: Before accessing the WEB, remove the cache and COOKIES of IE. Otherwise, it may cause the abnormal.

2. Forget the Password?

A: Forgetting the login password can be used to initialize the password by restoring the factory settings. Press the button at 10s. Initial user name "admin" and password "system".

3. Would be both working if configure by web or CLI?

A: Yes, both ways are working.

4. Why can't increase bandwidth after configuring Trunking ?

A: Please check if the information of Trunking set port is the same, including rate, duplex mode and VLAN etc.

5. How to deal with the problem of partial ports of switch?

A: When some ports are blocked on the switch, it may be the network cable fault, the network card failure or the switch port failure, users can test by following steps:

Test the failure:

- a. The connection of the computer and switch ports remains unchanged and replace other network cables.
- b. The network cable and switch port remain unchanged and change the computer;
- c. The network cable and computer remain unchanged and replace the switch ports;

d. If confirmed that is caused by the switch port failure, please contact the supplier for maintenance

6. What is the order of the port self-adaptive status detection?

A: Port of state testing was conducted in the following order: 1000Mbps full-duplex, 100Mbps full-duplex, 100Mbps half-duplex, 10Mbps full-duplex, 10 Mbps half-duplex. And automatically connect with maximum speed.

12. Maintenance

Clean this unit with a soft, dry cloth. Never use alcohol, paint thinner, or benzene to clean.

13. Warranty

If your product does not work properly because of a defect in materials or workmanship, our company (referred to as “the warrantor”) will, for the length of the period indicated as below, “Parts and Labor (5) Years”, which starts with the date of original purchase (“Limited Warranty period”), at its option either (a) repair your product with new or refurbished parts, or (b) replace it with a new or a refurbished product. The decision to repair or replace will be made by the warrantor.

During the “Labor” limited warranty period, there will be no charge for labor. During the “Parts” warranty period, there will be no charge for parts. You must mail-in your product during the warranty period. This Limited Warranty is extended only to the original purchaser and only covers products purchased as new. A purchase receipt or other proof of original purchase date is required for Limited Warranty service.

14. Mail-In Service

When shipping the unit, carefully pack and send it prepaid, adequately insured, and preferably in the original carton. Include a letter detailing the complaint and provide a day time phone and/or email address where you can be reached.

15. Limited Warranty Limits and Exclusions

This Limited Warranty ONLY COVERS failures due to defects in material or workmanship, and DOES NOT COVER normal wear and tear or cosmetic damage. The Limited Warranty ALSO DOES NOT COVER damages which occurred in shipment, or failures which are caused by products not supplied by warrantor, or failures which result from accidents, misuse, abuse, neglect, mishandling, misapplication, alteration, faulty installation, set-up adjustments, mis-adjustment of consumer controls, improper maintenance, power line surge, lightning damage, modification, or service by anyone other than a Factory Service center or other Authorized Servicer, or damage that is attributed to acts of God.

THERE ARE NO EXPRESS WARRANTIES EXCEPT AS LISTED UNDER “LIMITED WARRANTY COVERAGE”. THE WARRANTOR IS NOT LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES RESULTING FROM

THE USE OF THIS PRODUCT, OR ARISING OUT OF ANY BREACH OF THIS WARRANTY. (As examples, this excludes damages for lost time, cost of having someone remove or re-install an installed unit if applicable, travel to and from the service, loss of or damage to media or images, data or other recorded content. The items listed are not exclusive, but are for illustration only.) PARTS AND SERVICE, WHICH ARE NOT COVERED BY THIS LIMITED WARRANTY, ARE YOUR RESPONSIBILITY.



WWW.ZENTY.COM

9807 EMILY LANE

STAFFORD, TX 77477

(844) 200-1945

SALES@ZENTY.COM